

Chapter 3: Interior Wayfinding


Table of Contents

3.03		Sign Family Overview
3.07	OR.01	Main Lobby Orientation Directory, Small
3.08	OR.02	Main Lobby Orientation Directory, Large
3.09	OR.03	Main Lobby Orientation Directory, Integrated Digital
3.10	OR.10	Medical Center Elevator Level Directory, Small
3.11	OR.11	Medical Center Elevator Level Directory, Large
3.12	OR.12	Elevator Core Level Directory, Small
3.13	OR.13	Elevator Core Level Directory, Large
3.14	OR-S	Orientation Strips
3.15	OR.20	Orientation Map, Small
3.16	OR.21	Orientation Map, Large
3.17	DIR.01	Medical Center Core Directional, Small
3.18	DIR.02	Medical Center Core Directional, Large
3.19	DIR.03	Medical Center Core Directional, Freestanding
3.20	DIR-C.1	Medical Center Core Directional Detail
3.21	DIR.04	Core Directional, Small
3.22	DIR.05	Core Directional, Large
3.23	DIR.06	Core Directional, Freestanding
3.24	DIR-C.2	Core Directional Detail
3.25	OR - DIR	Installation Details
3.26	DIR.10	Medical Center Public Corridor Directional, Small
3.27	DIR.10-S	Public Corridor Directional, Small Strip Layouts
3.28	DIR.11	Medical Center Public Corridor Directional, Medium
3.29	DIR.12	Medical Center Public Corridor Directional, Large
3.30	DIR.13	Public Corridor Directional, Small
3.31	DIR.14	Public Corridor Directional, Medium
3.32	DIR.15	Public Corridor Directional, Large
3.33	DIR-S	Public Corridor Directional Strips
3.34	DIR.20	Directional, Small
3.35	DIR.21	Directional, Medium
3.36	DIR.21	Example Layouts
3.37	DIR.22	Directional, Large
3.38	DIR.30	Overhead Directional, Flag Mounted
3.39	DIR.30	Overhead Directional, Flag Mounted Layouts
3.40	DIR.40W	Overhead Directional, Wall Mounted
3.41	DIR.40C	Overhead Directional, Ceiling Mounted
3.42	DIR.40S	Overhead Directional, Suspended
3.43	DIR.40	Sign Face Layouts
3.44	DIR.41W	Overhead Directional, Double Line, Wall Mounted


3.45	DIR.41C	Overhead Directional, Double Line, Ceiling Mounted
3.46	DIR.41S	Overhead Directional, Double Line, Suspended
3.47	DIR.41	Sign Face Layouts

Interior Wayfinding


Sign Family Overview




DIR.01
Medical Center
Core Directional,
Small

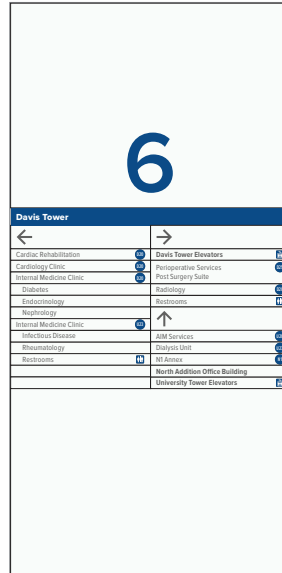


DIR.02
Medical Center
Core Directional,
Large

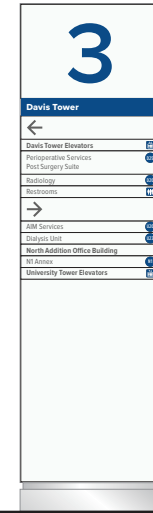


DIR.03
Medical Center
Core Directional,
Freestanding



DIR.04
Core Directional, Small

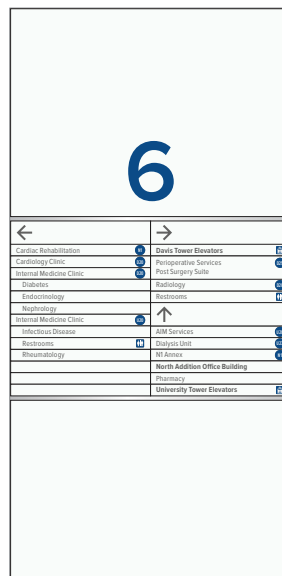


DIR.05
Core Directional, Large

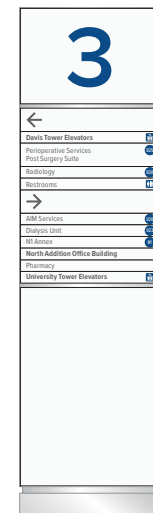


DIR.06
Core Directional,
Freestanding

Interior Wayfinding


Sign Family Overview




DIR.10
MC Public Corridor
Directional, Small




DIR.11
MC Public Corridor
Directional, Medium

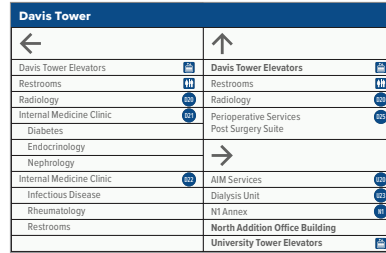


DIR.12
MC Public Corridor
Directional, Large




DIR.13
Public Corridor
Directional, Small




DIR.14
Public Corridor
Directional, Medium

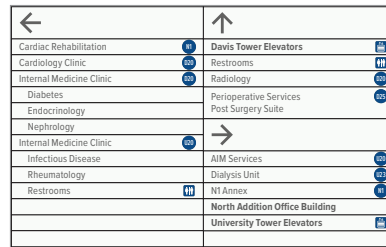


DIR.15
Public Corridor
Directional, Large




DIR.20
Directional, Small




DIR.21
Directional, Medium

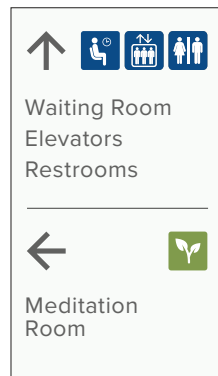

DIR.22
Directional, Large




DIR.30
Overhead Directional, Flag Mounted




DIR.40W
Overhead Directional,
Wall Mounted




DIR.40C
Overhead Directional,
Ceiling Mounted

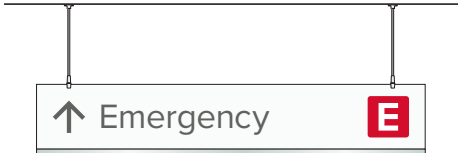


DIR.40S
Overhead Directional,
Suspended



DIR.41W
Overhead Directional,
Double Line, Wall Mounted



DIR.41C
Overhead Directional,
Double Line, Ceiling Mounted

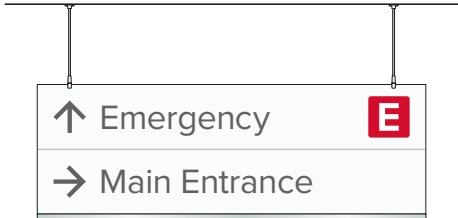

DIR.41S
Overhead Directional,
Double Line, Suspended

Interior Wayfinding

OR.01

Main Lobby Orientation Directory, Small

Usage

This sign type is used to help visitors and staff orient themselves upon arrival and find destinations including departments and amenities within the building.

- Limit destinations to primary departments grouped by floor. Destinations to start with Emergency Department on top, if applicable, and then departments listed in alphabetical order.
- Sign type size is dictated by the number of departments.
- Sign consultant to consult with FP&D Signage Program Representative and/or end user for usage requirements.

Placement

- Typically placed at the main public entry to the building in a visible position outside of the public path of travel to avoid congestion; placed near greeter's desk is preferred.

Components

- (A) Orientation Map: 1/4" thick non-glare acrylic mounted to (D) with magnetic backing
 - Finish: subsurface painted
 - Sides: 1/16" clear chamfered edges
 - Graphics: subsurface UV cured digital print
- (B) Strips: 1/4" thick non-glare acrylic mounted to (D) with magnetic backing
 - Finish: subsurface painted
 - Sides: 1/16" clear chamfered edges
 - Graphics: subsurface UV cured digital print
 - Typefaces: Proxima Nova Condensed Bold and Regular
 - See OR-S for additional strip details

- (C) Frames: (3) 2" deep aluminum angle frames
 - (2) frames to contain Strips
 - (1) frame to contain Orientation Map
 - Edge Finish: mitered corners and fine satin finish with grain running length of frame
 - Fabricator to engineer final frame dimensions to hold Orientation Map and Strips with magnetic backing in position
- (D) Cabinet: 2" deep fabricated aluminum cabinet with header and footer
 - Hardware and structure as required so that Orientation Map panel and Strips are flush to face of frame and header; thin tin applied to cabinet to attract magnetic backing
 - Finish: fine satin finish with horizontal grain
 - Graphics: 1/4" flat cutout acrylic, painted on all visible surfaces
 - Typeface: Proxima Nova Semibold


Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.

- (C1) White Wonder (C4) UC Davis Blue (M3) Brushed Aluminum

Installation


- See Appendix A, Drawing FD.72 for approved standard fabrication and installation detail.
- **Sign is anticipated to weigh over 20 lbs. Additional architecturally integrated and coordinated backing is required for hospital facilities per HCAI, and is recommended for consideration at all facilities.**

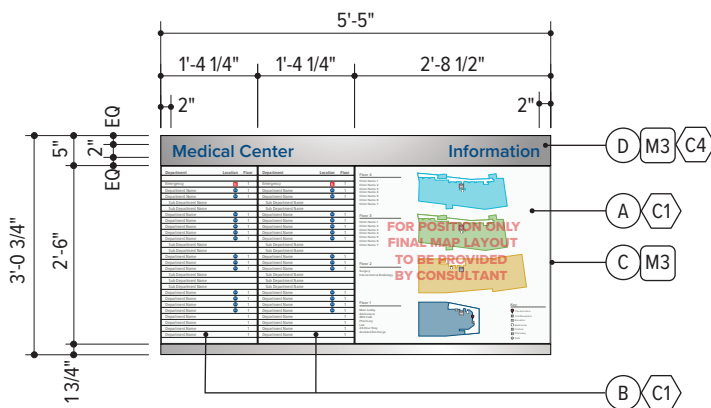

Front View
Scale: 3/8" = 1'-0"



Side View

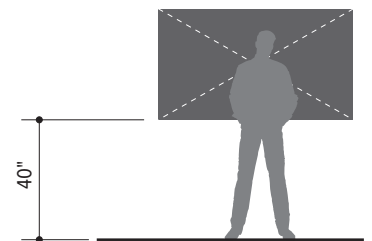

Installation Context
Scale: 3/16" = 1'-0"

Interior Wayfinding

OR.02

Main Lobby Orientation Directory, Large

Usage

This sign type is used to help visitors and staff orient themselves upon arrival and find destinations including departments and amenities within the building.

- Limit destinations to primary departments grouped by floor. Destinations to start with Emergency Department on top, if applicable, and then departments listed in alphabetical order.
- Sign type size is dictated by the number of departments.
- Sign consultant to consult with FP&D Signage Program Representative and/or end user for usage requirements.

Placement

- Typically placed at the main public entry to the building in a visible position outside of the public path of travel to avoid congestion; placed near greeter's desk is preferred.

Components

- (A) Orientation Map: 1/4" thick non-glare acrylic mounted to (D) with magnetic backing
 - Finish: subsurface painted
 - Sides: 1/16" clear chamfered edges
 - Graphics: subsurface UV cured digital print
- (B) Strips: 1/4" thick non-glare acrylic mounted to (D) with magnetic backing
 - Finish: subsurface painted
 - Sides: 1/16" clear chamfered edges
 - Graphics: subsurface UV cured digital print
 - Typefaces: Proxima Nova Condensed Bold and Regular
 - See OR-S for additional strip details

- (C) Frames: (4) 2" deep aluminum angle frames
 - (3) frames to contain Strips
 - (1) frame to contain Orientation Map
 - Edge Finish: mitered corners and fine satin finish with grain running length of frame
 - Fabricator to engineer final frame dimensions to hold Orientation Map and Strips with magnetic backing in position
- (D) Cabinet: 2" deep fabricated aluminum cabinet with header and footer
 - Hardware and structure as required so that Orientation Map panel and Strips are flush to face of frame and header; thin tin applied to cabinet to attract magnetic backing
 - Finish: fine satin finish with horizontal grain
 - Graphics: 1/4" flat cutout acrylic, painted on all visible surfaces
 - Typeface: Proxima Nova Semibold


Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.

- (C1) White Wonder
- (C4) UC Davis Blue
- (M3) Brushed Aluminum

Installation

- See Appendix A, Drawing FD.72 for approved standard fabrication and installation detail.
- **Sign is anticipated to weigh over 20 lbs. Additional architecturally integrated and coordinated backing is required for hospital facilities per HCAI, and is recommended for consideration at all facilities.**

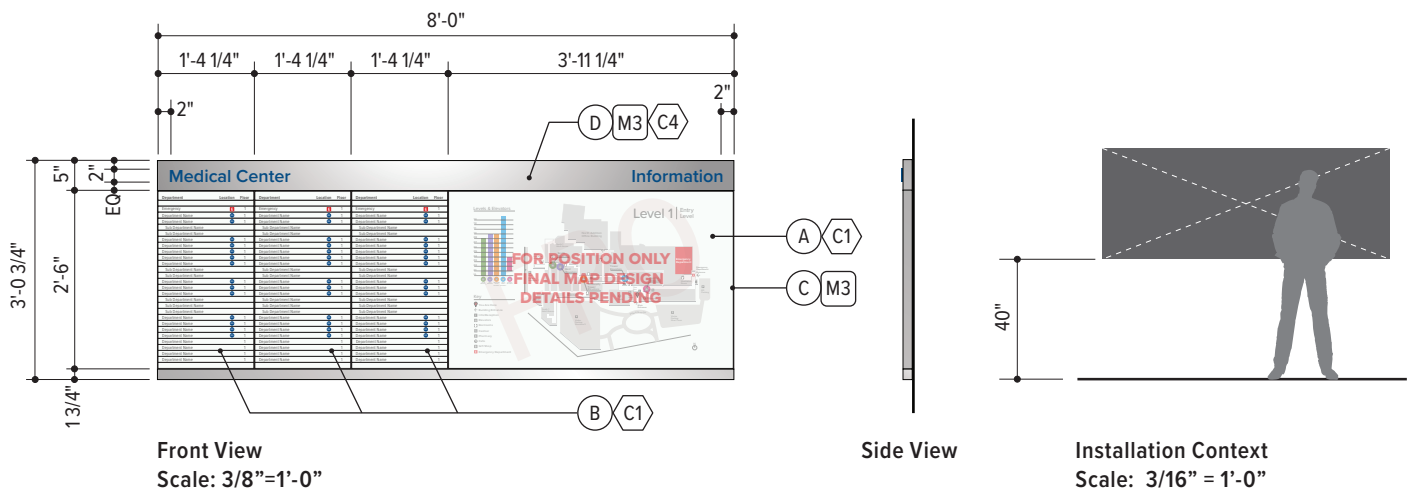

Interior Wayfinding

OR.10

Usage

This sign is used only at the Medical Center to help visitors and staff locate the floor to their final destination.

- Limit destinations to primary departments grouped by floor. Destinations to start with Emergency Department on top, if applicable, and then departments listed in alphabetical order.
- Sign type size is dictated by the number of departments.
- Sign consultant to consult with FP&D Signage Program Representative and/or end user for usage requirements.

Placement

- Placed in an easily visible location, ideally adjacent to the elevator call button in a public elevator lobby.

Components

- (A) Header: 1/4" thick non-glare acrylic
 - Finish: subsurface painted
 - Graphics: subsurface UV cured digital print
 - Typeface: Proxima Nova Extra Bold
 - Permanently fixed in place
 - Color to correspond with tower color in the Medical Center

Medical Center Elevator Level Directory, Small

- (B) Strips: 1/4" thick non-glare acrylic mounted to (C) with magnetic backing
 - Finish: subsurface painted
 - Sides: 1/16" clear chamfered edges
 - Graphics: subsurface UV cured digital print
 - Typefaces: Proxima Nova Condensed Bold and Regular
 - See OR-S for additional strip details
- (C) Frame: 5/8" deep aluminum angle frame
 - Edge Finish: mitered corners and fine satin finish with grain running length of frame
 - Back of sign: PVC panel with a thin tin film applied to attract magnetic strips
 - Fabricator to engineer final frame dimensions to hold acrylic strips with magnetic backing in position.
- (D) Sign is mechanically fastened to wall. Fabricator to engineer final weight and installation requirements


Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.


- (C1) White Wonder
- (D0) Printed White
- (M3) Brushed Aluminum

Installation


- See Appendix A, Drawing FD.70 for approved standard fabrication and installation detail
- Sign is anticipated to weigh over 20 lbs. Additional architecturally integrated and coordinated backing is required for hospital facilities per HCAI, and is recommended for consideration at all facilities.

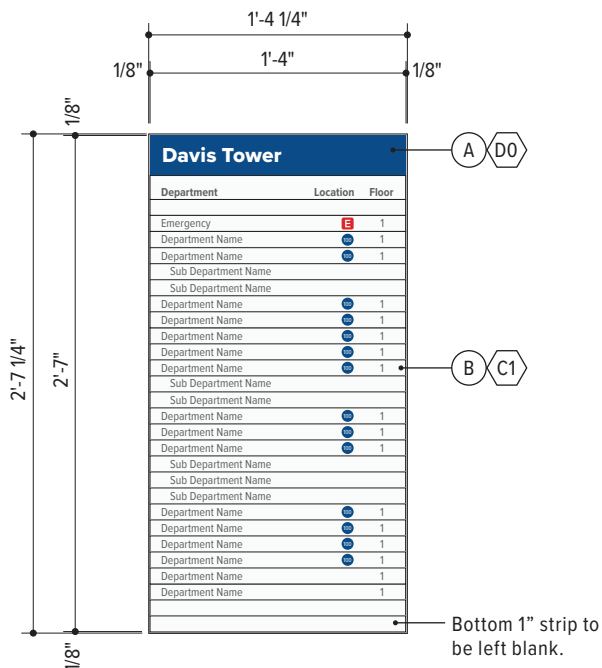

Front View
Scale: 1"=1'-0"

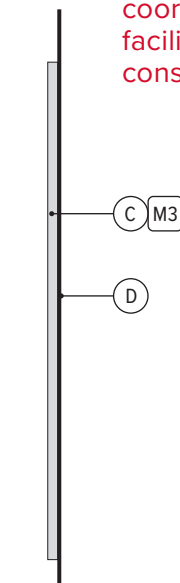

Side View

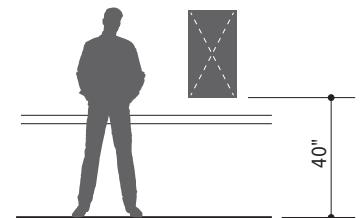

Installation Context
Scale: 3/16" = 1'-0"

Interior Wayfinding

OR.13

Elevator Core Level Directory, Large

Usage

This sign is used to help visitors and staff locate the floor to their final destination.

- Limit destinations to primary departments grouped by floor. Destinations to start with Emergency Department on top, if applicable, and then departments listed in alphabetical order.
- Sign type size is dictated by the number of departments.
- Sign consultant to consult with FP&D Signage Program Representative and/or end user for usage requirements.

Placement

- Placed in an easily visible location, ideally adjacent to the elevator call button in a public elevator lobby.

Components

- (A) Strips: 1/4" thick non-glare acrylic mounted to (B) with magnetic backing
 - Finish: subsurface painted
 - Sides: 1/16" clear chamfered edges
 - Graphics: subsurface UV cured digital print
 - Typefaces: Proxima Nova Condensed Bold and Regular
 - See OR-S for additional strip details

- (B) Frames: (2) 5/8" deep aluminum angle frames
 - Edge Finish: mitered corners and fine satin finish with grain running length of frame
 - Back of sign: PVC panel with a thin tin film applied to attract magnetic strips
 - Fabricator to engineer final frame dimensions to hold acrylic strips with magnetic backing in position
- (C) Sign is mechanically fastened to wall. Fabricator to engineer final weight and installation requirements


Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.

- (C1) White Wonder
- (D3) PMS Cool Gray 10C
- (M3) Brushed Aluminum

Installation

- See Appendix A, Drawing FD.70 for approved standard fabrication and installation detail.
- **Sign is anticipated to weigh over 20 lbs. Additional architecturally integrated and coordinated backing is required for hospital facilities per HCAI, and is recommended for consideration at all facilities.**

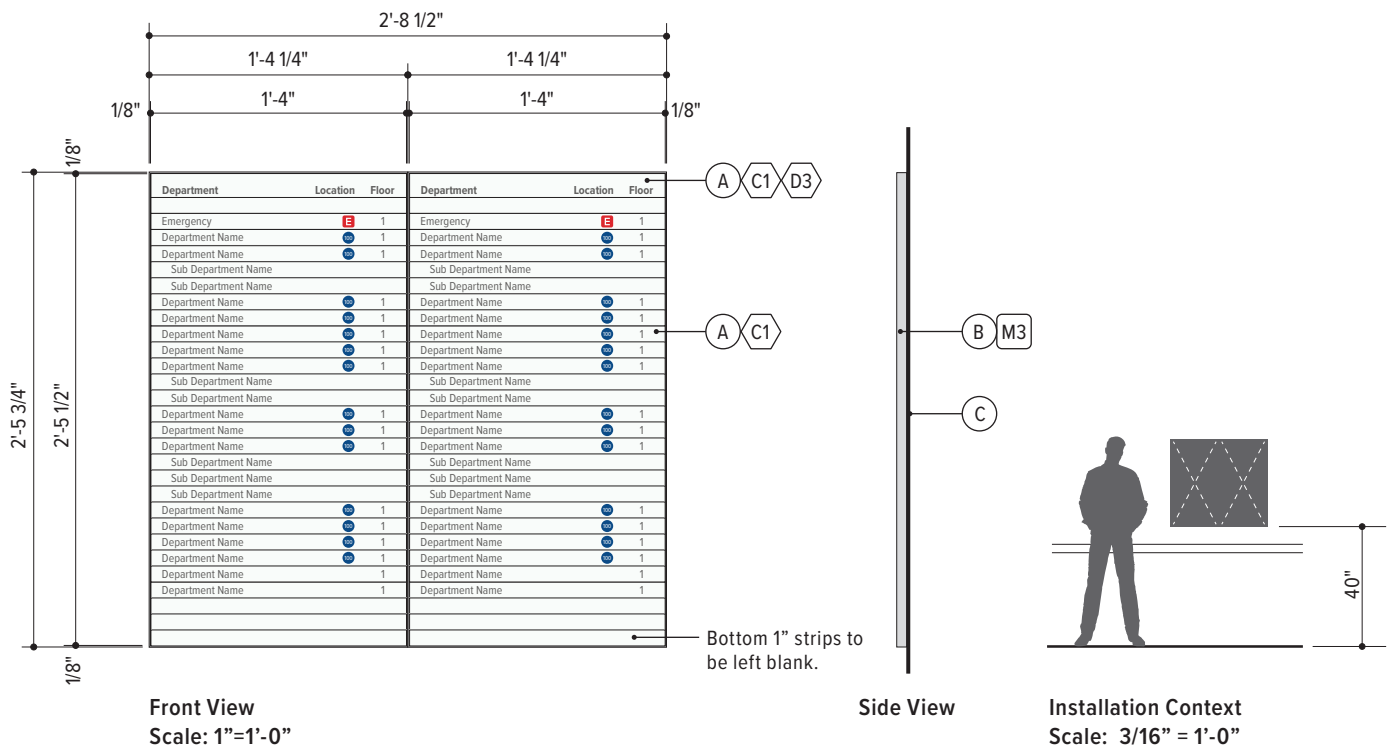

Interior Wayfinding

OR-S

Orientation Strips


Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.


C1 White Wonder C4 UC Davis Blue D0 Printed White D3 PMS Cool Gray 10C D4 UC Davis Blue



OR-S.1 Tower Header

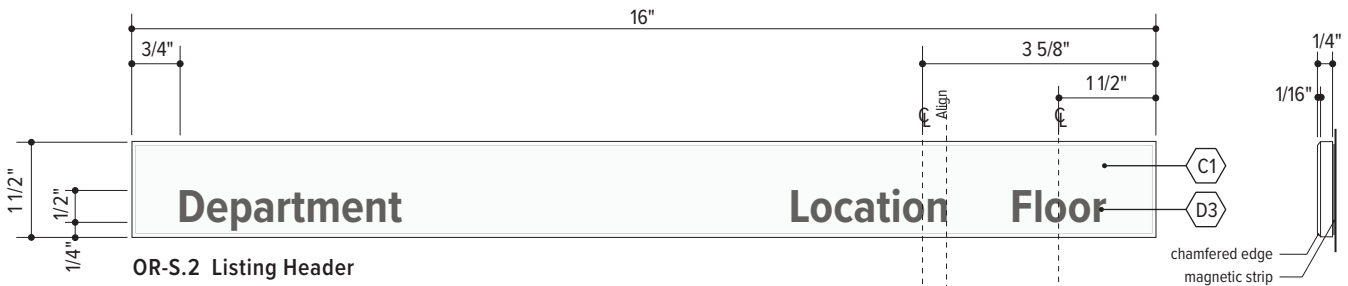

OR-S.2 Listing Header

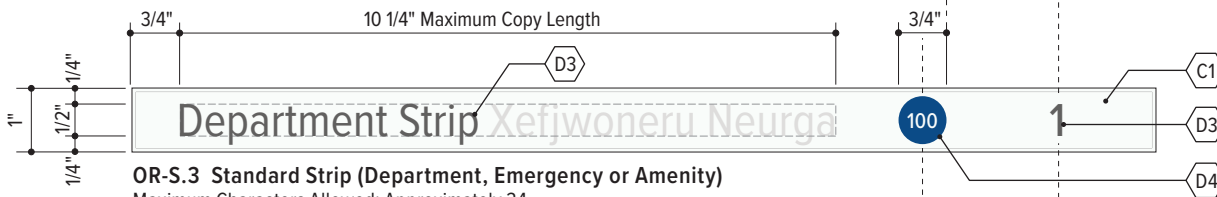

OR-S.3 Standard Strip (Department, Emergency or Amenity)
Maximum Characters Allowed: Approximately 34



OR-S.4 Double Tall Strip
Maximum Characters Allowed: Approximately 68



OR-S.5 Sub Department Strip
Maximum Characters Allowed: Approximately 32

Scale: 1:3

Interior Wayfinding

OR.20

Orientation Map, Small

Usage

This sign is used to help visitors and staff orient themselves to the space as needed while finding their way through the corridors of the facility.

- Limit destinations shown to primary departments and amenities on the current level.

Placement

- Sign is used in public corridors at key decision points to supplement wayfinding signage.

Components

- (A) Header & Footer Strips: 1/4" thick brushed aluminum laminate with digital printed text on header
 - Typeface: Proxima Nova Extra Bold
- (B) Orientation Map: 1/4" thick non-glare acrylic mounted to (C) with magnetic backing
 - Finish: subsurface painted
 - Sides: 1/16" clear chamfered edges
 - Graphics: subsurface UV cured digital print

- (C) Frame: 5/8" deep aluminum angle frame
 - Edge Finish: mitered corners and fine satin finish with grain running length of frame
 - Back of sign: PVC panel with a thin tin film applied to attract magnetic strips
 - Fabricator to engineer final frame dimensions to hold acrylic strips with magnetic backing in position
- (C) Sign is mechanically fastened to wall. Fabricator to engineer final weight and installation requirements


Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.

- (C1) White Wonder
- (D4) UC Davis Blue
- (M3) Brushed Aluminum

Installation

- See Appendix A, Drawing FD.70 for approved standard fabrication and installation detail.

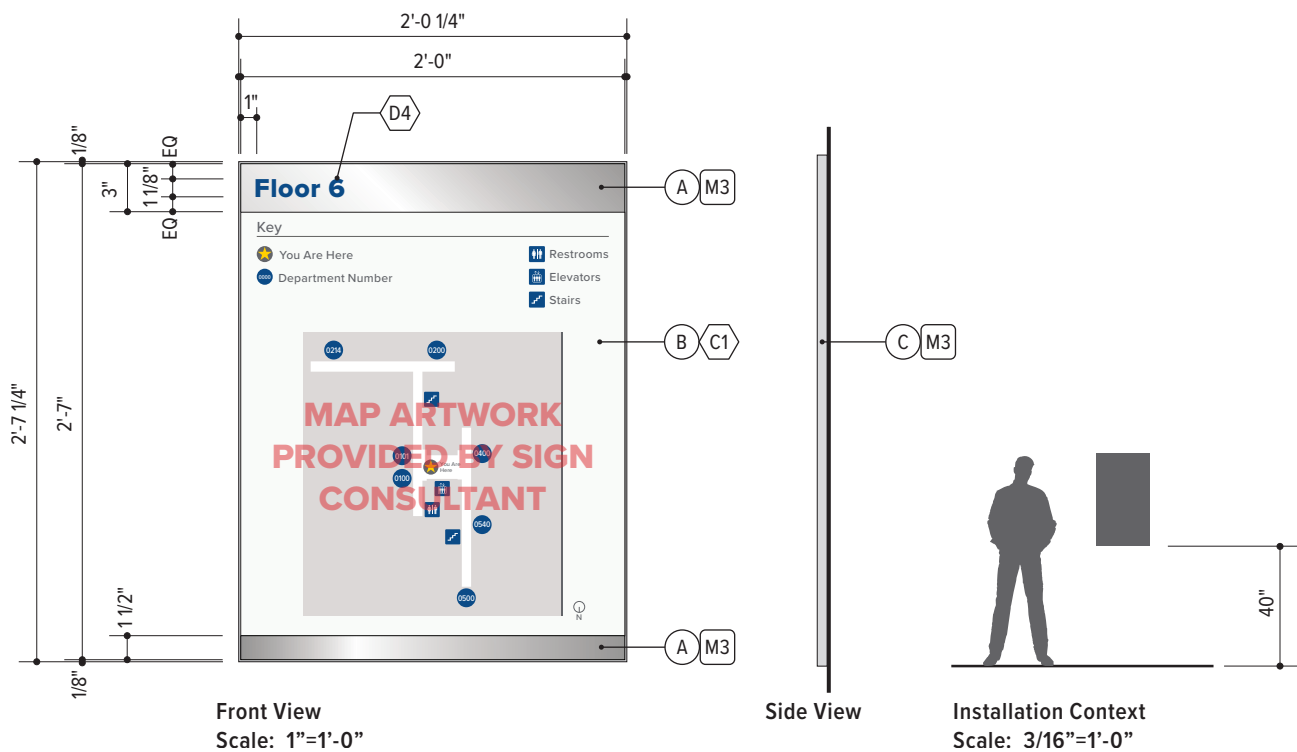

Interior Wayfinding

OR.21

Orientation Map, Large

Usage

This sign is used to help visitors and staff orient themselves to the space as needed while finding their way through the corridors of the facility.

- Limit destinations shown to primary departments and amenities on the current level.

Placement

- Sign is used in public corridors at key decision points to supplement wayfinding signage.

Components

- (A) Header & Footer Strips: 1/4" thick brushed aluminum laminate with digital printed text on header
 - Typeface: Proxima Nova Extra Bold
- (B) Orientation Map: 1/4" thick non-glare acrylic mounted to (C) with magnetic backing
 - Finish: subsurface painted
 - Sides: 1/16" clear chamfered edges
 - Graphics: subsurface UV cured digital print

- (C) Frame: 5/8" deep aluminum angle frame
 - Edge Finish: mitered corners and fine satin finish with grain running length of frame
 - Back of sign: PVC panel with a thin tin film applied to attract magnetic strips
 - Fabricator to engineer final frame dimensions to hold acrylic strips with magnetic backing in position
- (C) Sign is mechanically fastened to wall. Fabricator to engineer final weight and installation requirements


Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.

- (C1) White Wonder
- (D4) UC Davis Blue
- (M3) Brushed Aluminum

Installation

- See Appendix A, Drawing FD.70 for approved standard fabrication and installation detail.

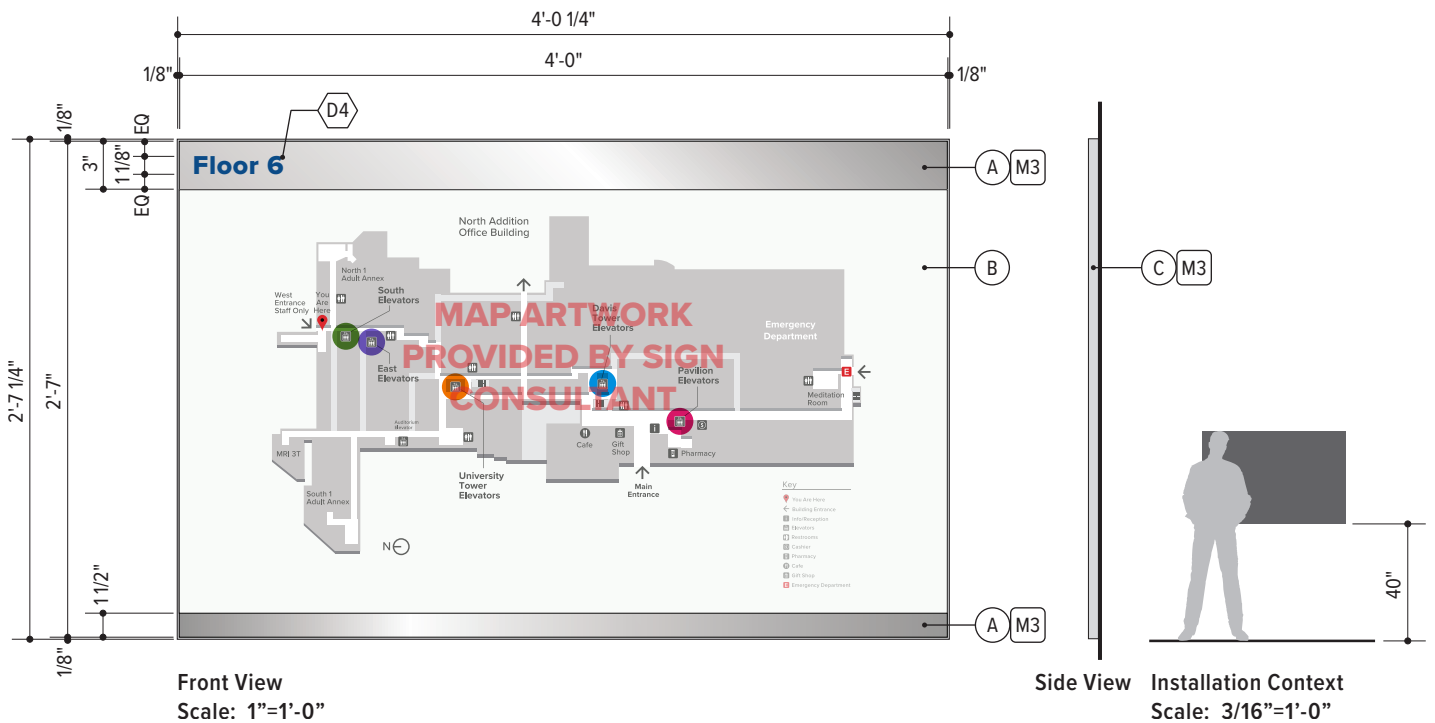

Interior Wayfinding

DIR.01

Medical Center Core Directional, Small

Usage

This sign type is used only at the Medical Center. Its intent is to be a primary wayfinding sign for patients and visitors to encounter as they exit the elevator lobby.

- Identifies floor number and destinations
- Identifies the tower name in the Medical Center
- Limit destinations to elevators, amenities, and primary departments grouped by direction. Destinations to start with Emergency Department on top, if applicable. Directions should be displayed with up first, then left, then right, with listings in alphabetical order.
- Elevator names are to be shown in Proxima Nova Condensed Bold font.

Placement

- Place adjacent to public elevator lobbies within plain view of the primary path of travel from the elevator core.

Overall Sizing


- The overall mounting height of the sign is not to exceed 8'-10" AFF.
- The top panel of the sign should be designed and fabricated so that there is a 2-inch gap from the finished ceiling to the top of the header panel, when the ceiling is between 8- to 9-feet.
- The bottom of the sign should be mounted with a 2-inch gap above the base board, or 8-inches above the finished floor if no base board is provided.
- The message panel text to be placed between 40" and 70".

Graphics

See DIR-C.1 for graphics details.

Installation

- Sign is anticipated to weigh over 20 lbs. Additional architecturally integrated and coordinated backing is required for hospital facilities per HCAI, and is recommended for consideration at all facilities.

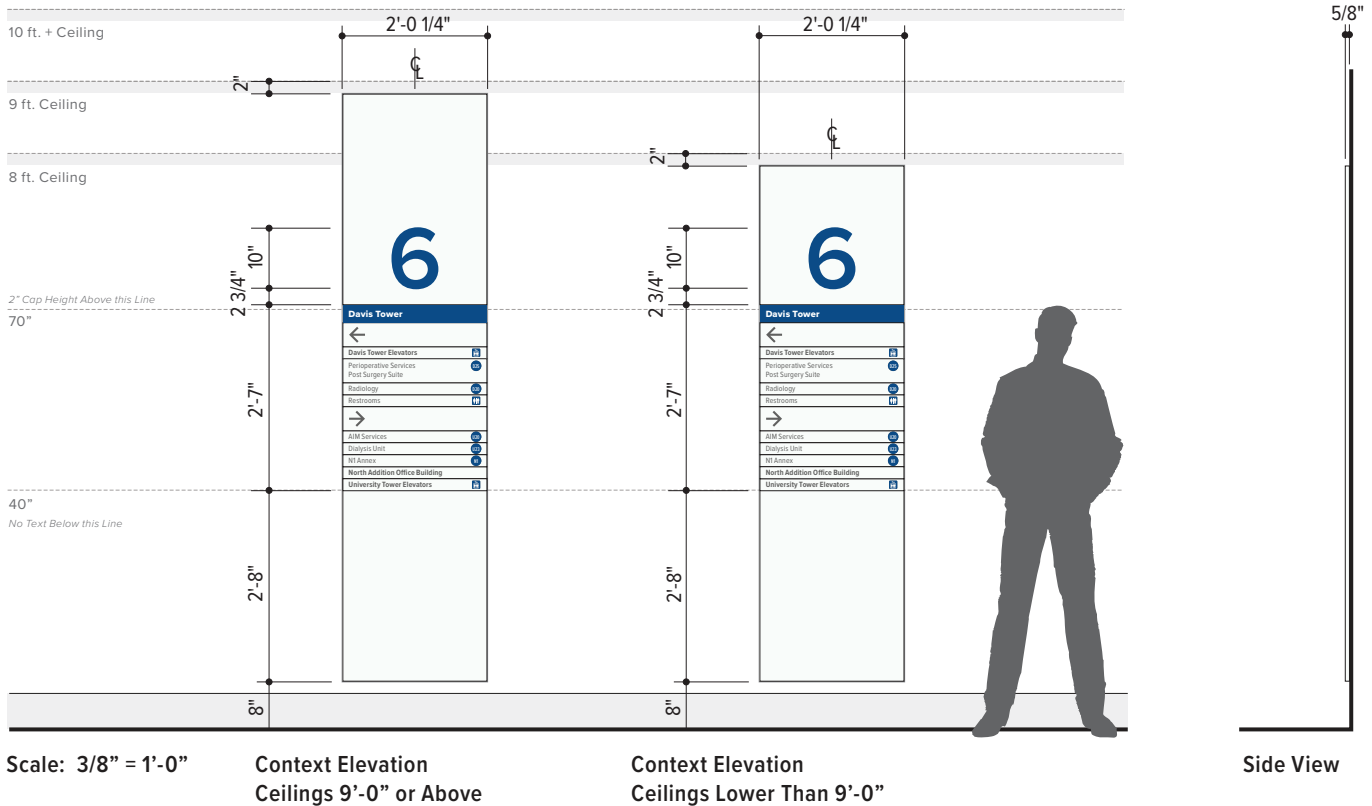

Interior Wayfinding

DIR.02

Medical Center Core Directional, Large

Usage

This sign type is used only at the Medical Center. Its intent is to be a primary wayfinding sign for patients and visitors to encounter as they exit the elevator lobby.

- Identifies floor number and destinations
- Identifies the tower name in the Medical Center
- Limit destinations to elevators, amenities, and primary departments grouped by direction. Destinations to start with Emergency Department on top, if applicable. Directions should be displayed with up first, then left, then right, with listings in alphabetical order.
- Elevator names are to be shown in Proxima Nova Condensed Bold font.
- **Only use this sign type and size when necessary.**

Placement

- Place adjacent to public elevator lobbies within plain view of the primary path of travel from the elevator core.

Overall Sizing


- The overall mounting height of the sign is not to exceed 8'-10" AFF.
- The top panel of the sign should be designed and fabricated so that there is a 2-inch gap from the finished ceiling to the top of the header panel, when the ceiling is between 8- to 9-feet.
- The bottom of the sign should be mounted with a 2-inch gap above the base board, or 8-inches above the finished floor if no base board is provided.
- The message panel text to be placed between 40" and 70".

Graphics

See DIR-C.1 for graphics details.

Installation

- **Sign is anticipated to weigh over 20 lbs. Additional architecturally integrated and coordinated backing is required for hospital facilities per HCAI, and is recommended for consideration at all facilities.**

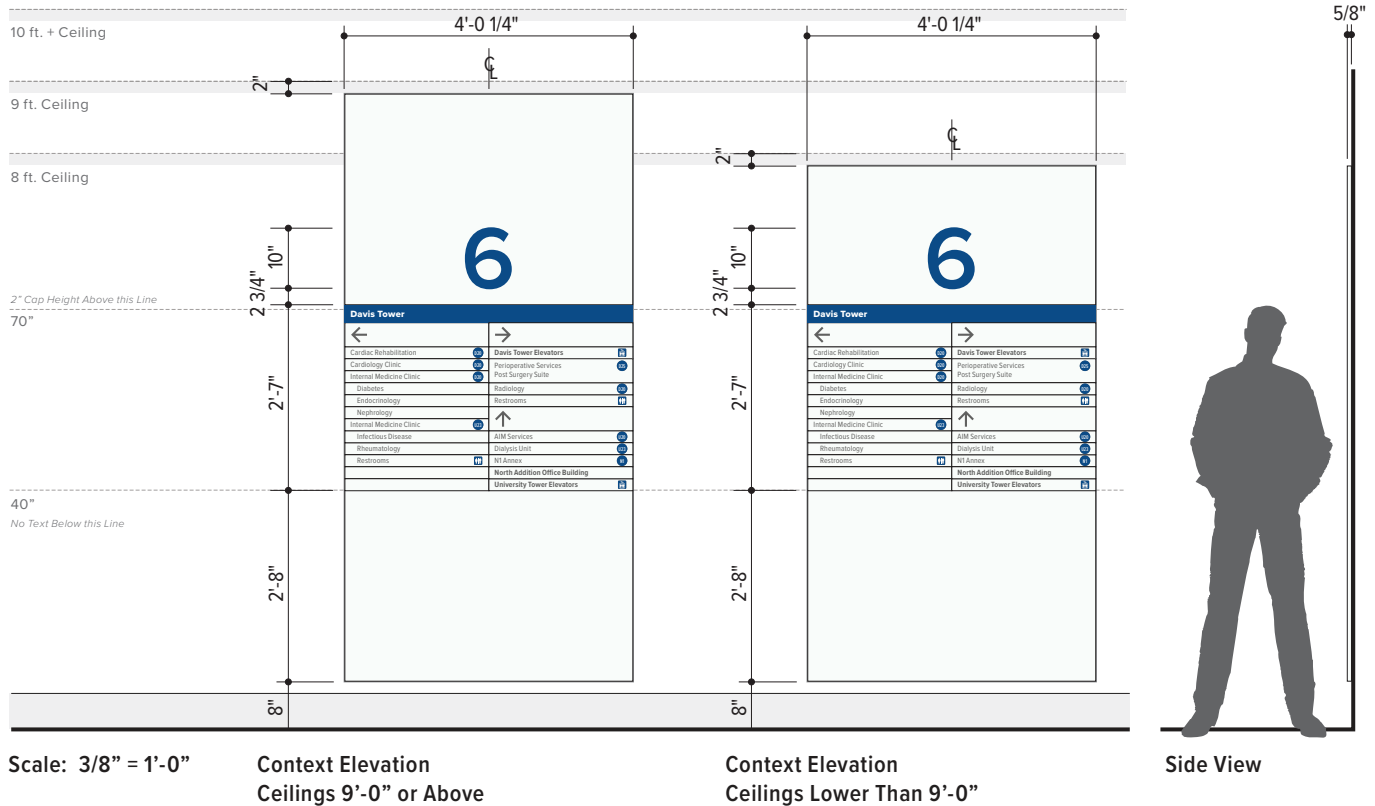

Interior Wayfinding

DIR.03

Usage

This sign type is used only at the Medical Center. Its intent is to be a primary wayfinding sign for patients and visitors to encounter as they exit the elevator lobby.


- Identifies floor number and destinations
- Identifies the tower name in the Medical Center
- Limit destinations to elevators, amenities, and primary departments grouped by direction. Destinations to start with Emergency Department on top, if applicable. Directions should be displayed with up first, then left, then right, with listings in alphabetical order.
- Elevator names are to be shown in Proxima Nova Condensed Bold font.

Placement

- Place adjacent to public elevator lobbies within plain view of the primary path of travel from the elevator core.

Components

- Ⓐ Cabinet: Fabricated freestanding aluminum sign cabinet with internal structure; eased edges and corners
 - Fabricator to engineer sign cabinet to hold 1/4" thick acrylic panels
 - See DIR-C.1 for graphic details of face only

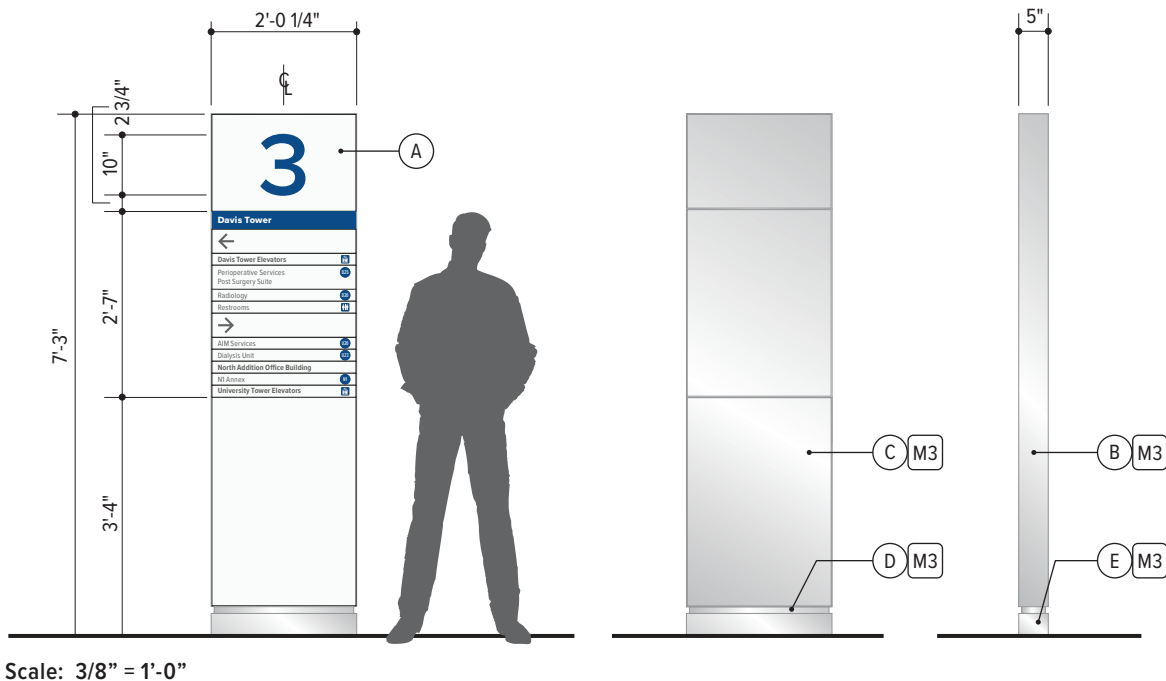

Medical Center Core Directional, Freestanding

- Ⓑ Frame: Fabricated aluminum angle frame and returns with mitered edges
 - Finish: fine satin finish with grain running length of frame
- Ⓒ 1/8" aluminum fascia panel with fine satin finish
- Ⓓ Reveal: Brushed aluminum
- Ⓔ Base: Fabricated aluminum shroud to conceal footing and attachments; paint finish all exposed surfaces; provide engineered connection to finished floor

Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.

Ⓜ3 Brushed Aluminum

Graphics

See DIR-C.1 for graphics details.

Installation

- See Appendix A, Drawings FD.71 and FD.75 for approved standard fabrication and installation detail.

Interior Wayfinding

DIR-C.1

Medical Center Core Directional Detail

Components

- (A) Header Strip: 1/4" thick non-glare acrylic
 - Finish: subsurface painted
 - Graphics: subsurface UV cured digital print
 - Typeface: Proxima Nova Extra Bold
 - Permanently fixed in place
 - Color to correspond with tower color if in the Medical Center, or UC Davis Health Blue in other facilities
- (B) Strips: 1/4" thick non-glare acrylic mounted to (C) with magnetic backing
 - Finish: subsurface painted
 - Sides: 1/16" clear chamfered edges
 - Graphics: subsurface UV cured digital print
 - Typefaces: Proxima Nova Condensed Bold and Regular
- (C) Frame: 5/8" deep aluminum angle frame
 - Edge Finish: mitered corners and fine satin finish with grain running length of frame
 - Back of Sign: PVC panel with a thin tin film applied to attract magnetic backing
 - Fabricator to engineer final frame dimensions to hold Strips with magnetic backing in position

- (D) Header & Footer Panel: fabricate similarly to (A) Header Strip
- (E) Graphics: 1/4" thick water-jet cut acrylic level number, painted on all visible surfaces.
 - Typeface: Proxima Nova Semibold

Graphics

See DIR-S for additional Header and Strip details.


Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.

- (C1) White Wonder
- (C4) UC Davis Blue
- (D0) Printed White
- (M3) Brushed Aluminum

Installation

- See Appendix A, Drawing FD.71 for approved standard fabrication and installation detail.
- Fabricator to engineer final weight and installation requirements.

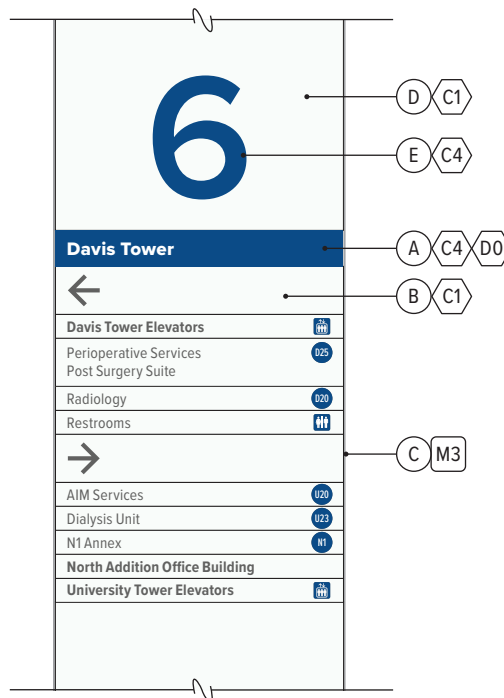

Front View
Scale: 3/4"=1'-0"

Interior Wayfinding

DIR.04

Core Directional, Small

Usage

The intent of this sign type is to be a primary wayfinding sign for patients and visitors to encounter as they exit the elevator lobby.

- Identifies floor number and destinations
- Limit destinations to elevators, amenities, and primary departments grouped by direction. Directions should be displayed with up first, then left, then right, with listings in alphabetical order.

Placement

- Place adjacent to public elevator lobbies within plain view of the primary path of travel from the elevator core.

Overall Sizing

- The overall mounting height of the sign is not to exceed 8'-10" AFF.


- The top panel of the sign should be designed and fabricated so that there is a 2-inch gap from the finished ceiling to the top of the header panel, when the ceiling is between 8- to 9-feet.
- The bottom of the sign should be mounted with a 2-inch gap above the base board, or 8-inches above the finished floor if no base board is provided.
- The message panel text to be placed between 40" and 70".

Graphics

See DIR-C.2 for graphics details.

Installation

- Sign is anticipated to weigh over 20 lbs. Additional architecturally integrated and coordinated backing is required for hospital facilities per HCAI, and is recommended for consideration at all facilities.

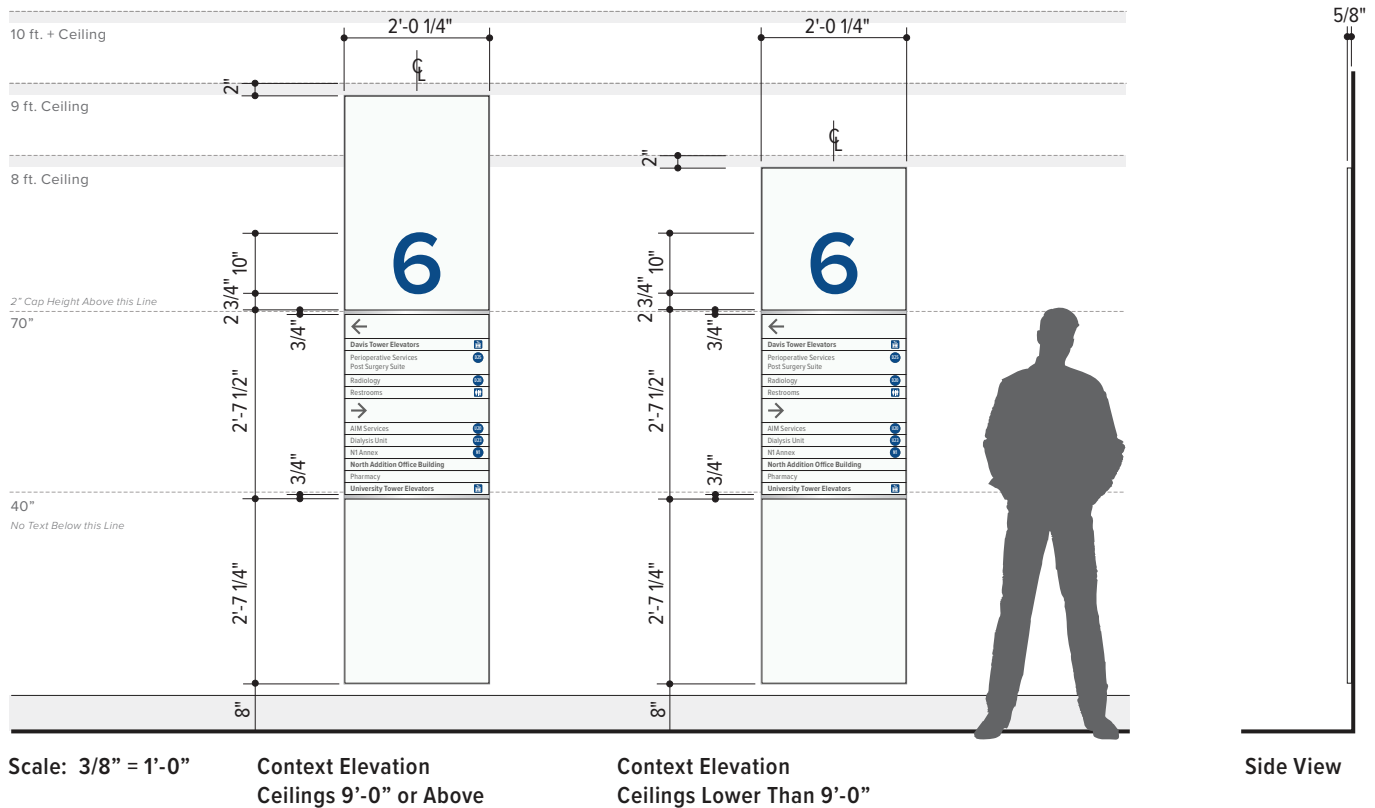

Interior Wayfinding

DIR.05

Core Directional, Large

Usage

The intent of this sign type is to be a primary wayfinding sign for patients and visitors to encounter as they exit the elevator lobby.

- Identifies floor number and destinations
- Limit destinations to elevators, amenities, and primary departments grouped by direction. Directions should be displayed with up first, then left, then right, with listings in alphabetical order.
- **Only use this sign type and size when necessary**

Placement

- Place adjacent to public elevator lobbies within plain view of the primary path of travel from the elevator core.

Overall Sizing

- The overall mounting height of the sign is not to exceed 8'-10" AFF.


- The top panel of the sign should be designed and fabricated so that there is a 2-inch gap from the finished ceiling to the top of the header panel, when the ceiling is between 8- to 9-feet.
- The bottom of the sign should be mounted with a 2-inch gap above the base board, or 8-inches above the finished floor if no base board is provided.
- The message panel text to be placed between 40" and 70".

Graphics

See DIR-C.2 for graphics details.

Installation

- **Sign is anticipated to weigh over 20 lbs. Additional architecturally integrated and coordinated backing is required for hospital facilities per HCAI, and is recommended for consideration at all facilities.**

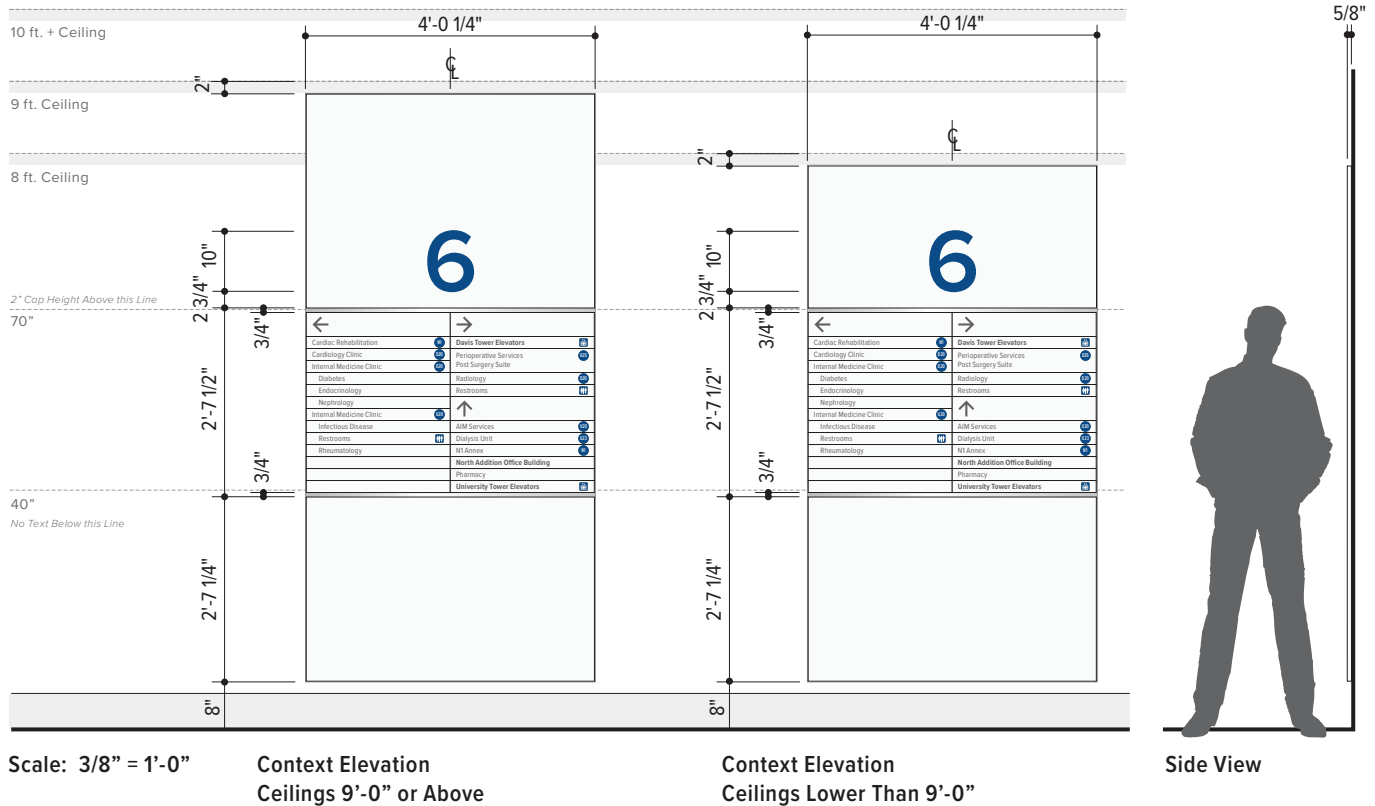

Interior Wayfinding

DIR.06

Core Directional, Freestanding

Usage

The intent of this sign type is to be a primary wayfinding sign for patients and visitors to encounter as they exit the elevator lobby.

- Identifies floor number and destinations
- Limit destinations to elevators, amenities, and primary departments grouped by direction. Directions should be displayed with up first, then left, then right, with listings in alphabetical order.

Placement

- Place adjacent to public elevator lobbies within plain view of the primary path of travel from the elevator core.

Components

- (A) Cabinet: Fabricated freestanding aluminum sign cabinet with internal structure; eased edges and corners.
 - Fabricator to engineer sign cabinet to hold 1/4" thick acrylic panels and brushed aluminum strips.
 - See DIR-C.2 for graphic details of face only.
- (B) Frame: Fabricated aluminum angle frame and returns with mitered edges
 - Finish: fine satin finish with grain running length of frame

- (C) 1/8" aluminum fascia panel with fine satin finish
- (D) Reveal: Brushed aluminum.
- (E) Base: Fabricated aluminum shroud to conceal footing and attachments; paint finish all exposed surfaces. Provide engineered connection to finished floor.

Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.


M3 Brushed Aluminum

Graphics

See DIR-C.2 for graphics details.

Installation

- See Appendix A, Drawing FD.71 and FD.75 for approved standard fabrication and installation detail.

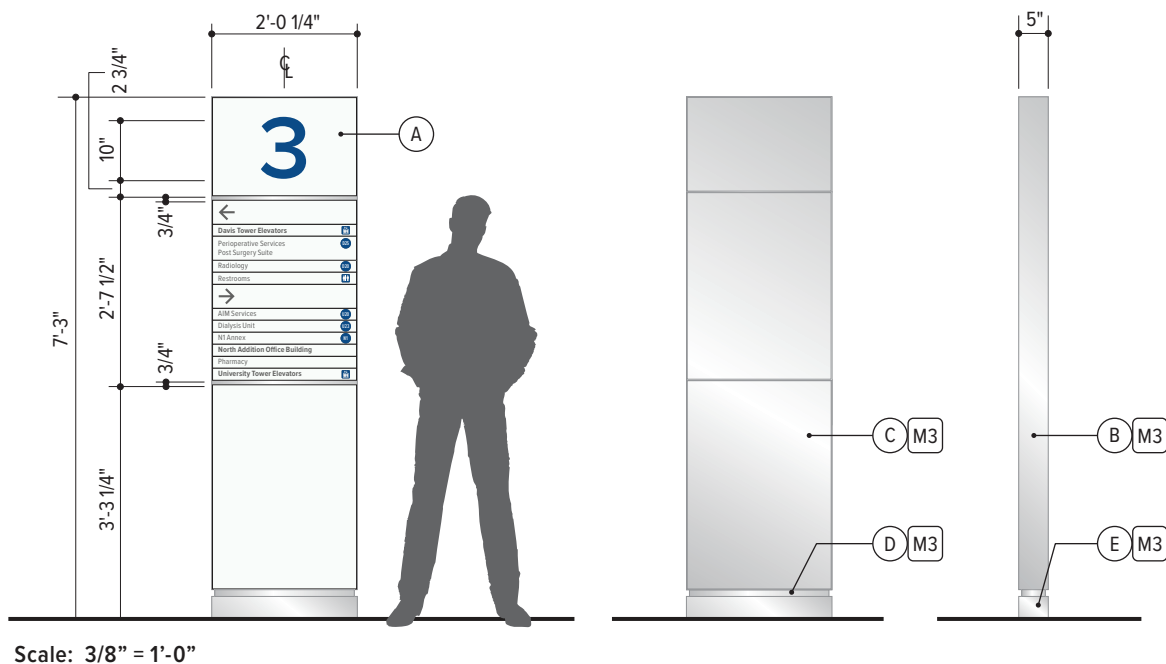

Interior Wayfinding

DIR-C.2

Core Directional Detail

Components

- (A) Header Strip: 1/4" thick brushed aluminum laminate
- (B) Strips: 1/4" thick non-glare acrylic mounted to (C) with magnetic backing
 - Finish: subsurface painted
 - Sides: 1/16" clear chamfered edges
 - Graphics: subsurface UV cured digital print
 - Typefaces: Proxima Nova Condensed Bold and Regular
- (C) Frame: 5/8" deep aluminum angle frame
 - Edge Finish: mitered corners and fine satin finish with grain running length of frame
 - Back of Sign: PVC panel with a thin tin film applied to attract magnetic backing
 - Fabricator to engineer final frame dimensions to hold Strips with magnetic backing in position

- (D) Header & Footer Panel: 1/4" thick non-glare acrylic
 - Finish: subsurface painted
 - Permanently fixed in place
- (E) Graphics: 1/4" thick water-jet cut acrylic level number, painted on all visible surfaces.
 - Typeface: Proxima Nova Semibold

Graphics

See DIR-S for additional Header and Strip details.


Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.

- (C1) White Wonder
- (C4) UC Davis Blue
- (M3) Brushed Aluminum

Installation

- See Appendix A, Drawing FD.71 for approved standard fabrication and installation detail.
- Fabricator to engineer final weight and installation requirements.

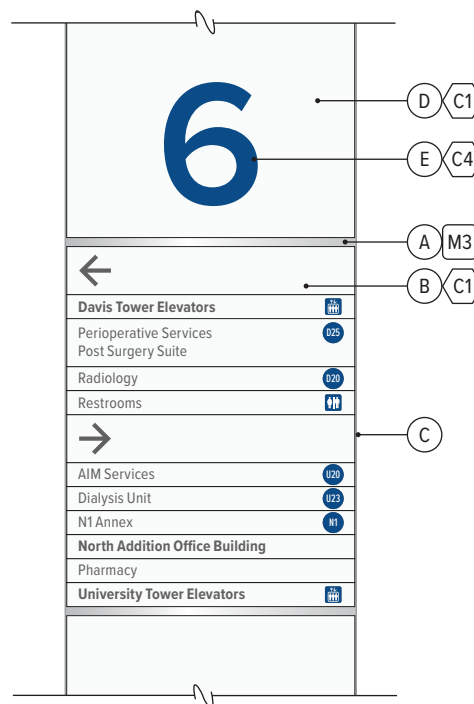


Front View
Scale: 3/4"=1'-0"


Interior Wayfinding

OR - DIR

Installation Details

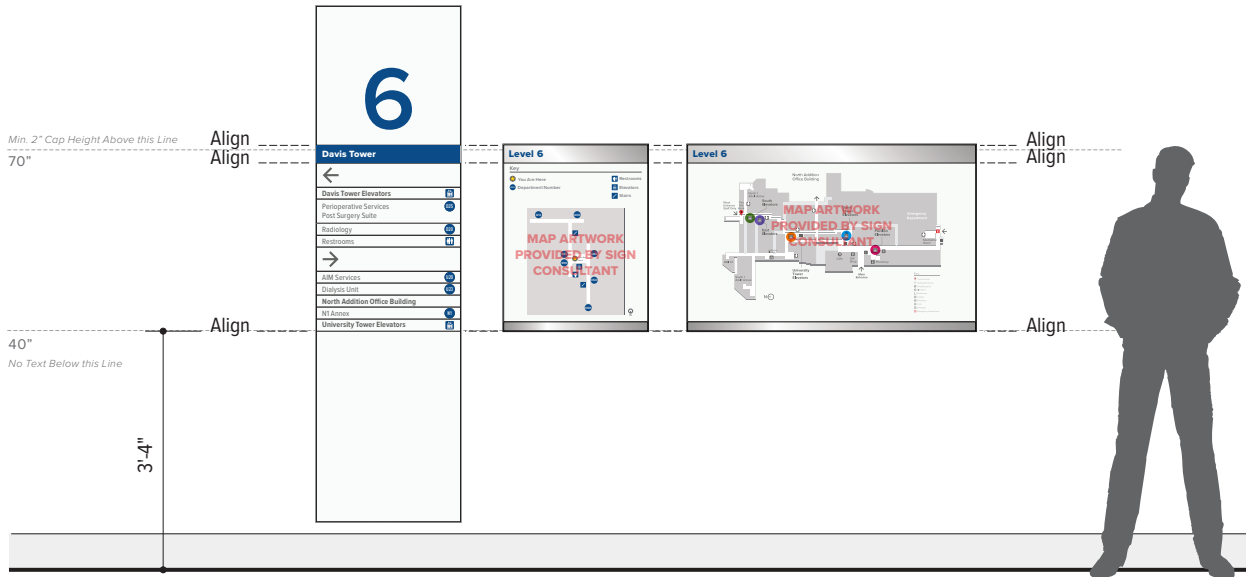

For Medical Center Use Only

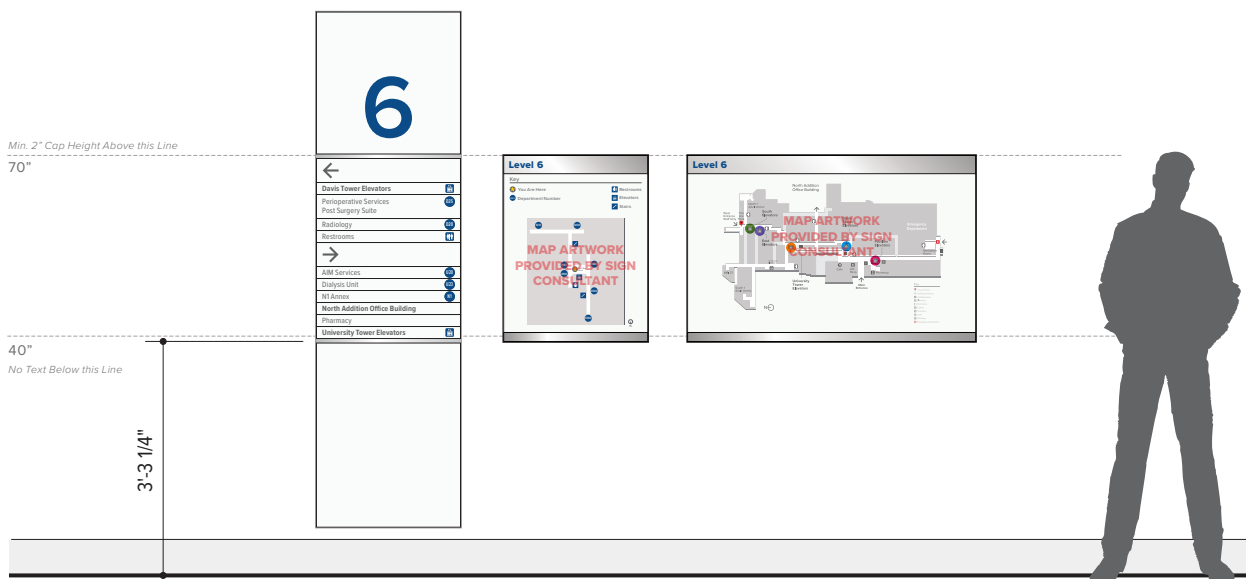

Interior Wayfinding

DIR.10

Medical Center Public Corridor Directional, Small

Usage

This sign type is used only at the Medical Center in public corridors to help visitors and staff navigate to departments, amenities, and other destinations within the building.

- Limit destinations to elevators, amenities, and primary departments grouped by direction. Directions should be displayed with up first, then left, then right, with listings in alphabetical order.
- **Only use this sign type and size when condition does not allow and does not fit DIR.11.**

Placement

- Sign is to be placed at primary decision points along the path of travel, typically corridor intersections.

Components

- (A) Header: 1/4" thick non-glare acrylic
 - Finish: subsurface painted
 - Graphics: subsurface UV cured digital print
 - Typeface: Proxima Nova Extra Bold
 - Permanently fixed in place
 - Color to correspond with tower color in the Medical Center
- (B) Strips: 1/4" thick non-glare acrylic mounted to (C) with magnetic backing
 - Finish: subsurface painted

- Sides: 1/16" clear chamfered edges
- Graphics: subsurface UV cured digital print
- Typefaces: Proxima Nova Condensed Bold and Regular
- (C) Frame: 5/8" deep aluminum angle frame
 - Edge Finish: mitered corners and fine satin finish with grain running length of frame
 - Back of Sign: PVC panel with a thin tin film applied to attract magnetic backing
 - Fabricator to engineer final frame dimensions to hold Strips with magnetic backing in position

Graphics

- See DIR.10-S for additional Header and Strip details.


Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.

- (C1) White Wonder
- (C4) UC Davis Blue
- (M3) Brushed Aluminum

Installation

- See Appendix A, Drawing FD.70 for approved standard fabrication and installation detail.
- **Sign is anticipated to weigh over 20 lbs. Additional architecturally integrated and coordinated backing is required for hospital facilities per HCAI, and is recommended for consideration at all facilities.**

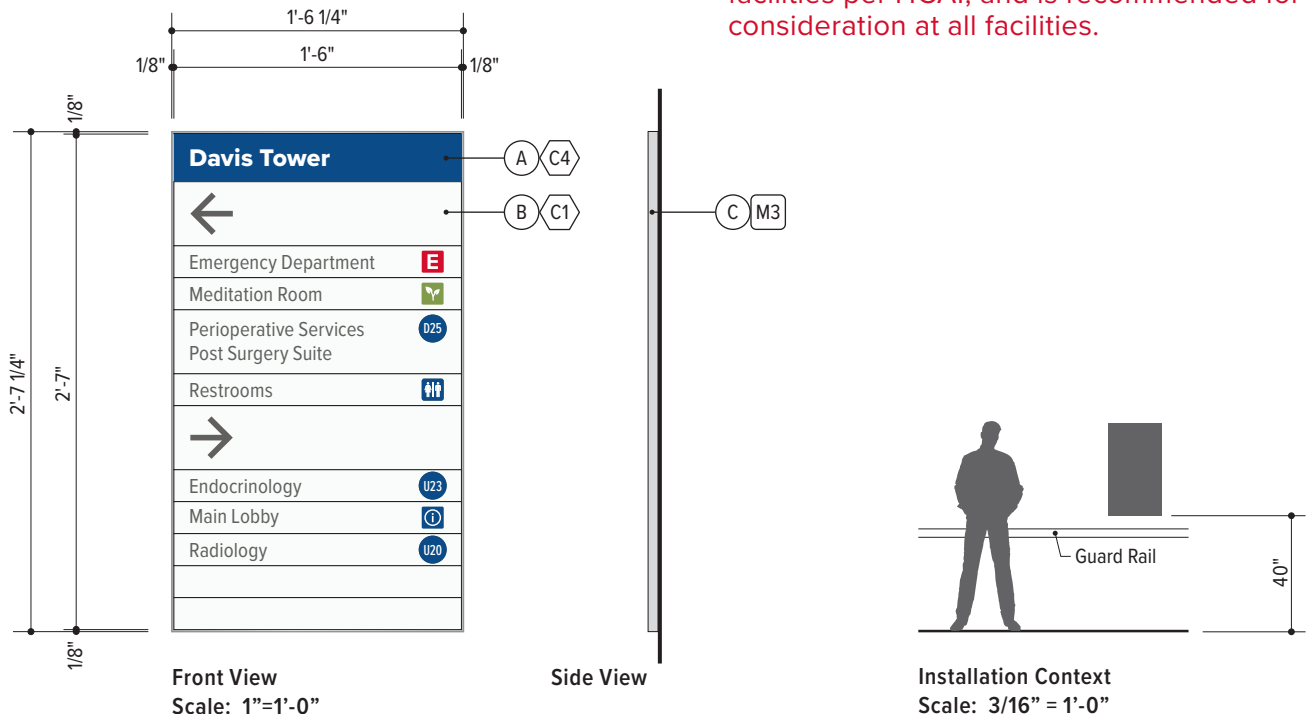

Interior Wayfinding


DIR.10-S

Public Corridor Directional, Small Strip Layouts


Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.


C1 White Wonder C4 UC Davis Blue D0 Printed White D3 PMS Cool Gray 10C D4 UC Davis Blue

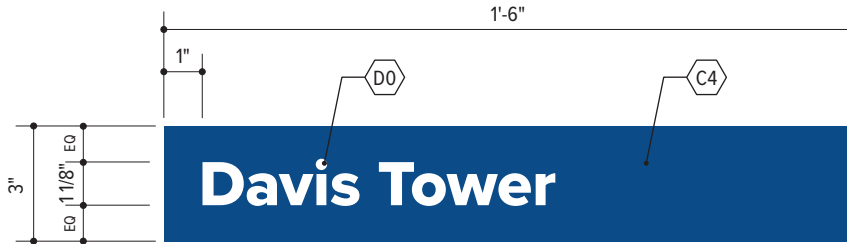


DIR.10-S.1 Tower Header

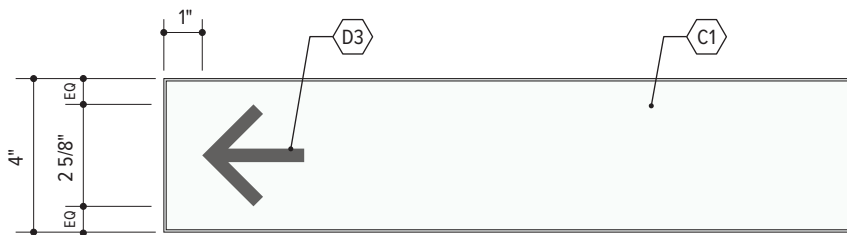

DIR.10-S.2 Directional Strip

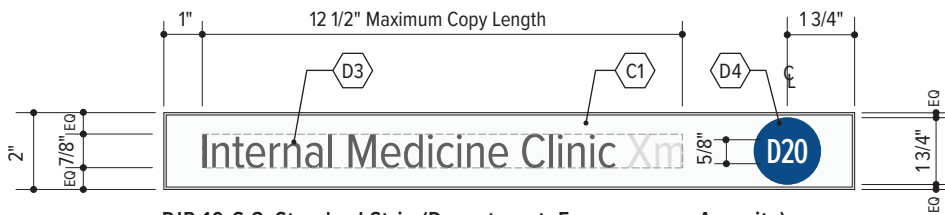

DIR.10-S.3 Standard Strip (Department, Emergency or Amenity)
Maximum Characters Allowed: Approximately 27

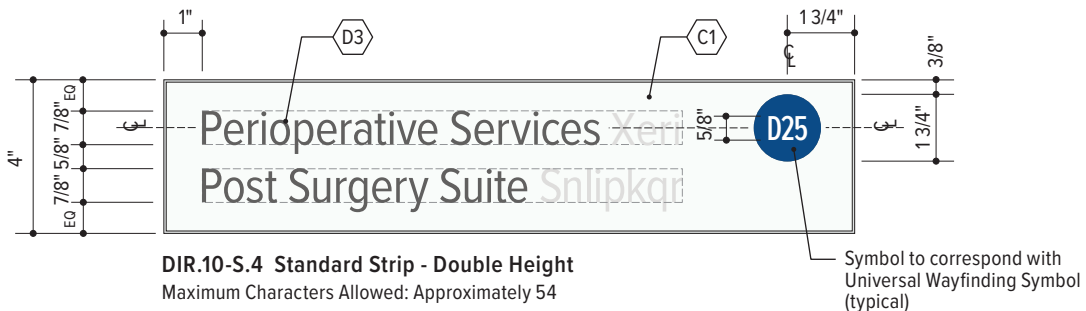

DIR.10-S.4 Standard Strip - Double Height
Maximum Characters Allowed: Approximately 54

Scale: 1:5

Interior Wayfinding

DIR.11

Medical Center Public Corridor Directional, Medium

Usage

This sign type is used only at the Medical Center in public corridors to help visitors and staff navigate to departments, amenities, and other destinations within the building.

- Limit destinations to elevators, amenities, and primary departments grouped by direction. Directions should be displayed with up first, then left, then right, with listings in alphabetical order.
- **Preferred sign type and size for public corridor directional.**

Placement

- Sign is to be placed at primary decision points along the path of travel, typically corridor intersections.

Components

- (A) Header: 1/4" thick non-glare acrylic
 - Finish: subsurface painted
 - Graphics: subsurface UV cured digital print
 - Typeface: Proxima Nova Extra Bold
 - Permanently fixed in place
 - Color to correspond with tower color in the Medical Center
- (B) Strips: 1/4" thick non-glare acrylic mounted to (C) with magnetic backing
 - Finish: subsurface painted

- Sides: 1/16" clear chamfered edges
- Graphics: subsurface UV cured digital print
- Typefaces: Proxima Nova Condensed Bold and Regular
- (C) Frame: 5/8" deep aluminum angle frame
 - Edge Finish: mitered corners and fine satin finish with grain running length of frame
 - Back of Sign: PVC panel with a thin tin film applied to attract magnetic backing
 - Fabricator to engineer final frame dimensions to hold Strips with magnetic backing in position

Graphics

- See DIR-S for additional Header and Strip details.


Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.

- (C1) White Wonder
- (C4) UC Davis Blue
- (M3) Brushed Aluminum

Installation

- See Appendix A, Drawing FD.70 for approved standard fabrication and installation detail.
- **Sign is anticipated to weigh over 20 lbs. Additional architecturally integrated and coordinated backing is required for hospital facilities per HCAI, and is recommended for consideration at all facilities.**

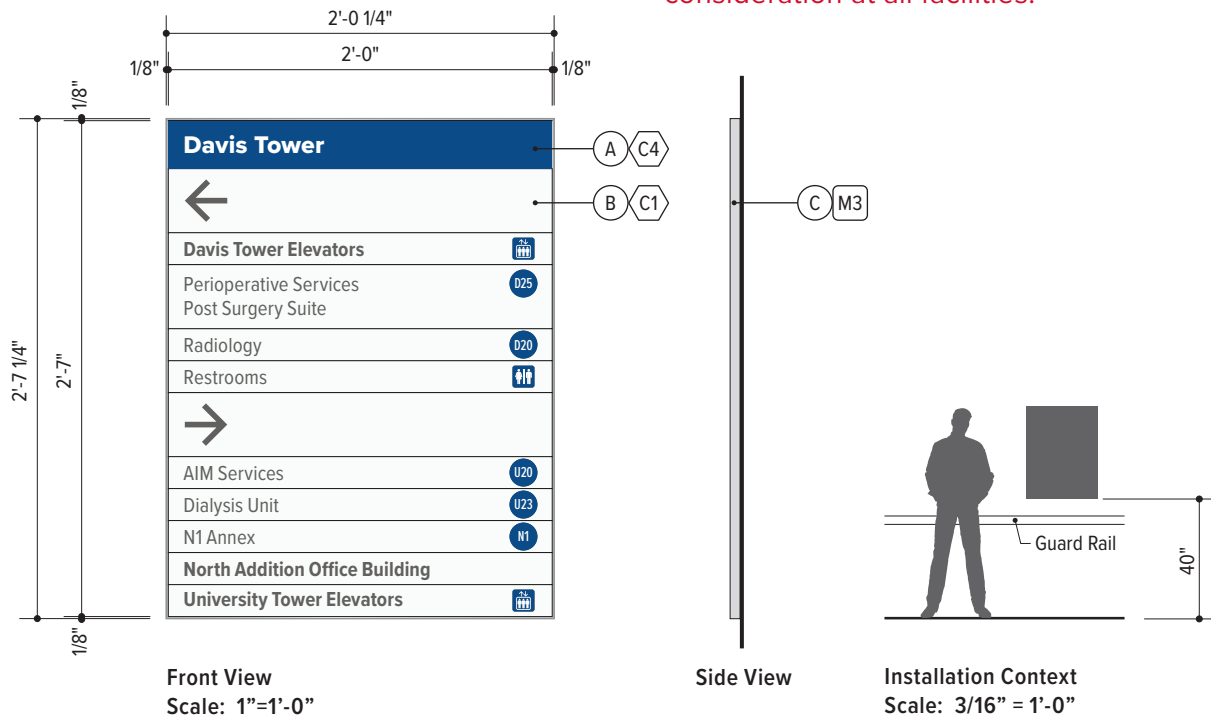

Interior Wayfinding

DIR.12

Medical Center Public Corridor Directional, Large

Usage

This sign type is used only at the Medical Center in public corridors to help visitors and staff navigate to departments, amenities, and other destinations within the building.

- Limit destinations to elevators, amenities, and primary departments grouped by direction. Directions should be displayed with up first, then left, then right, with listings in alphabetical order.
- **Only use this sign type and size when necessary.**

Placement

- Sign is to be placed at primary decision points along the path of travel, typically corridor intersections.

Components

- (A) Header: 1/4" thick non-glare acrylic
 - Finish: subsurface painted
 - Graphics: subsurface UV cured digital print
 - Typeface: Proxima Nova Extra Bold
 - Permanently fixed in place
 - Color to correspond with tower color in the Medical Center
- (B) Strips: 1/4" thick non-glare acrylic mounted to (C) with magnetic backing
 - Finish: subsurface painted

- Sides: 1/16" clear chamfered edges
- Graphics: subsurface UV cured digital print
- Typefaces: Proxima Nova Condensed Bold and Regular
- (C) Frames: (2) 5/8" deep aluminum angle frames
 - Edge Finish: mitered corners and fine satin finish with grain running length of frame
 - Back of Sign: PVC panel with a thin tin film applied to attract magnetic backing
 - Fabricator to engineer final frame dimensions to hold Strips with magnetic backing in position

Graphics

- See DIR-S for additional Header and Strip details.


Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.

- (C1) White Wonder
- (C4) UC Davis Blue
- (M3) Brushed Aluminum

Installation

- See Appendix A, Drawing FD.70 for approved standard fabrication and installation detail.
- **Sign is anticipated to weigh over 20 lbs. Additional architecturally integrated and coordinated backing is required for hospital facilities per HCAI, and is recommended for consideration at all facilities.**

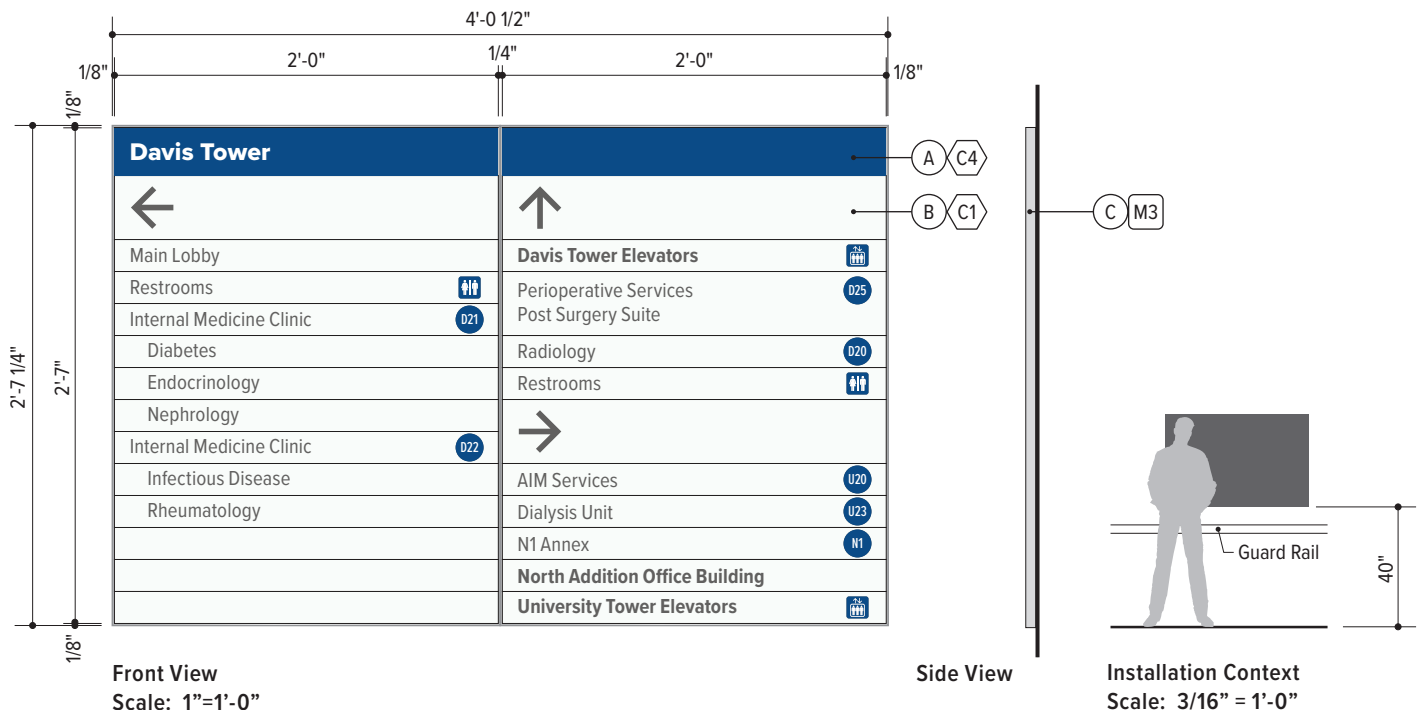

Interior Wayfinding

DIR.13

Public Corridor Directional, Small

Usage

This sign type is used in public corridors to help visitors and staff navigate to departments, amenities, and other destinations within the building.

- Limit destinations to elevators, amenities, and primary departments grouped by direction. Directions should be displayed with up first, then left, then right, with listings in alphabetical order.
- **Only use this sign type and size when conditions do not allow for use of DIR.14.**

Placement

- Sign is to be placed at primary decision points along the path of travel, typically corridor intersections.

Components

- (A) Strips: 1/4" thick non-glare acrylic mounted to (B) with magnetic backing
 - Finish: subsurface painted
 - Sides: 1/16" clear chamfered edges
 - Graphics: subsurface UV cured digital print
 - Typefaces: Proxima Nova Condensed Bold and Regular

- (B) Frame: 5/8" deep aluminum angle frame
 - Edge Finish: mitered corners and fine satin finish with grain running length of frame
 - Back of Sign: PVC panel with a thin tin film applied to attract magnetic backing
 - Fabricator to engineer final frame dimensions to hold Strips with magnetic backing in position

Graphics

- See DIR.10-S for additional Strip details.

Colors & Materials


References as noted below. See Chapter 1: Universal Standards for specifications.

(C1) White Wonder


(M3) Brushed Aluminum

Installation


- See Appendix A, Drawing FD.70 for approved standard fabrication and installation detail.
- **Sign is anticipated to weigh over 20 lbs. Additional architecturally integrated and coordinated backing is required for hospital facilities per HCAI, and is recommended for consideration at all facilities.**

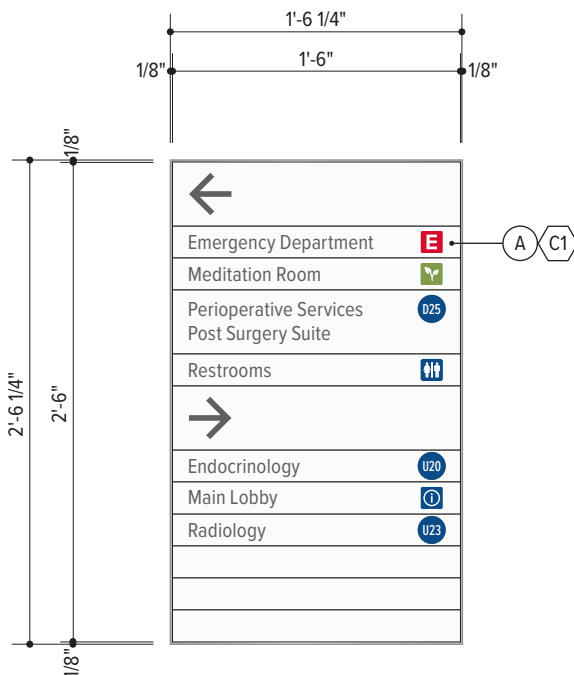

Front View
Scale: 1"=1'-0"

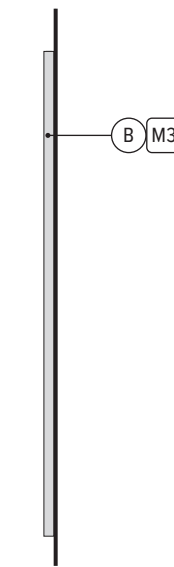

Side View

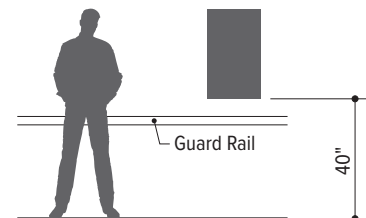

Installation Context
Scale: 3/16" = 1'-0"

Interior Wayfinding

DIR.14

Public Corridor Directional, Medium

Usage

This sign type is used in public corridors to help visitors and staff navigate to departments, amenities, and other destinations within the building.

- Limit destinations to elevators, amenities, and primary departments grouped by direction. Directions should be displayed with up first, then left, then right, with listings in alphabetical order.
- Preferred sign type and size of public corridor directional.

Placement

- Sign is to be placed at primary decision points along the path of travel, typically corridor intersections.

Components

- (A) Strips: 1/4" thick non-glare acrylic mounted to (B) with magnetic backing
 - Finish: subsurface painted
 - Sides: 1/16" clear chamfered edges
 - Graphics: subsurface UV cured digital print
 - Typefaces: Proxima Nova Condensed Bold and Regular

- (B) Frame: 5/8" deep aluminum angle frame
 - Edge Finish: mitered corners and fine satin finish with grain running length of frame
 - Back of Sign: PVC panel with a thin tin film applied to attract magnetic backing
 - Fabricator to engineer final frame dimensions to hold Strips with magnetic backing in position

Graphics

- See DIR-S for additional Strip details.

Colors & Materials


References as noted below. See Chapter 1: Universal Standards for specifications.

(C1) White Wonder

(M3) Brushed Aluminum

Installation

- See Appendix A, Drawing FD.70 for approved standard fabrication and installation detail.
- Sign is anticipated to weigh over 20 lbs. Additional architecturally integrated and coordinated backing is required for hospital facilities per HCAI, and is recommended for consideration at all facilities.

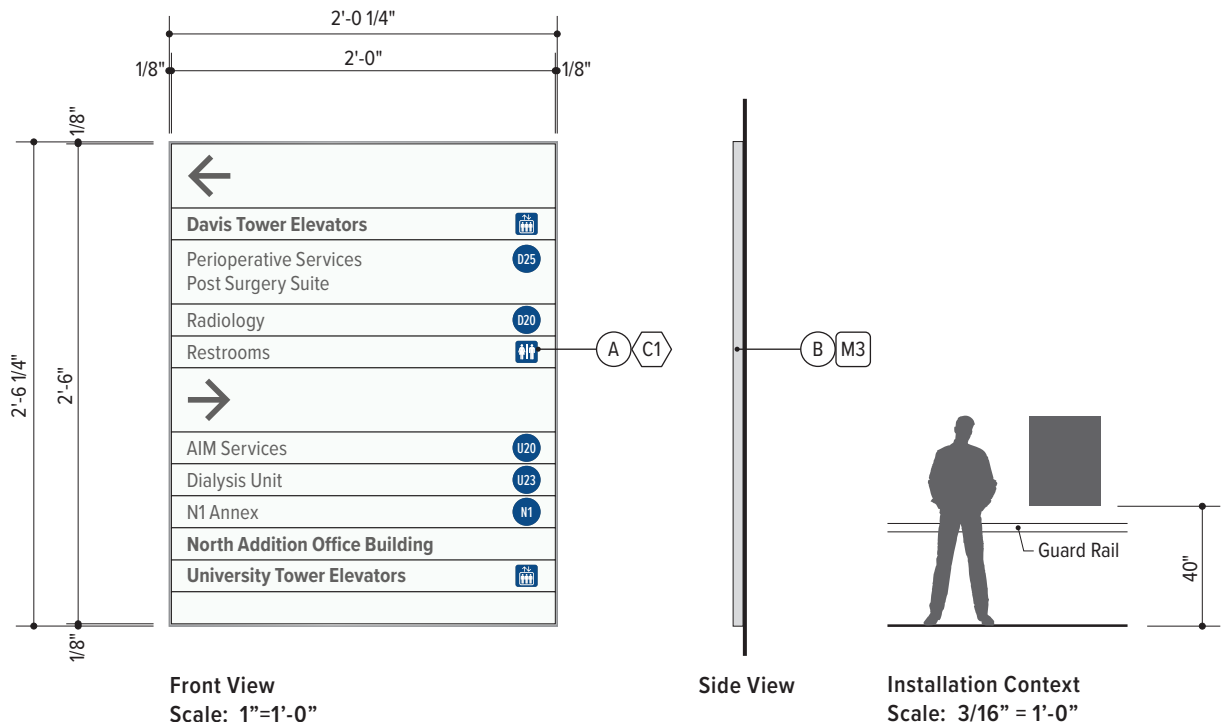

Interior Wayfinding

DIR.15

Public Corridor Directional, Large

Usage

This sign type is used in public corridors to help visitors and staff navigate to departments, amenities, and other destinations within the building.

- Limit destinations to elevators, amenities, and primary departments grouped by direction. Directions should be displayed with up first, then left, then right, with listings in alphabetical order.
- **Only use this sign type and size when necessary.**

Placement

- Sign is to be placed at primary decision points along the path of travel, typically corridor intersections.

Components

- (A) Strips: 1/4" thick non-glare acrylic mounted to (B) with magnetic backing
 - Finish: subsurface painted
 - Sides: 1/16" clear chamfered edges
 - Graphics: subsurface UV cured digital print
 - Typefaces: Proxima Nova Condensed Bold and Regular

- (B) Frames: (2) 5/8" deep aluminum angle frames
 - Edge Finish: mitered corners and fine satin finish with grain running length of frame
 - Back of Sign: PVC panel with a thin tin film applied to attract magnetic backing
 - Fabricator to engineer final frame dimensions to hold Strips with magnetic backing in position

Graphics

- See DIR-S for additional Strip details.

Colors & Materials


References as noted below. See Chapter 1: Universal Standards for specifications.

(C1) White Wonder

(M3) Brushed Aluminum

Installation

- See Appendix A, Drawing FD.70 for approved standard fabrication and installation detail.
- **Sign is anticipated to weigh over 20 lbs. Additional architecturally integrated and coordinated backing is required for hospital facilities per HCAI, and is recommended for consideration at all facilities.**

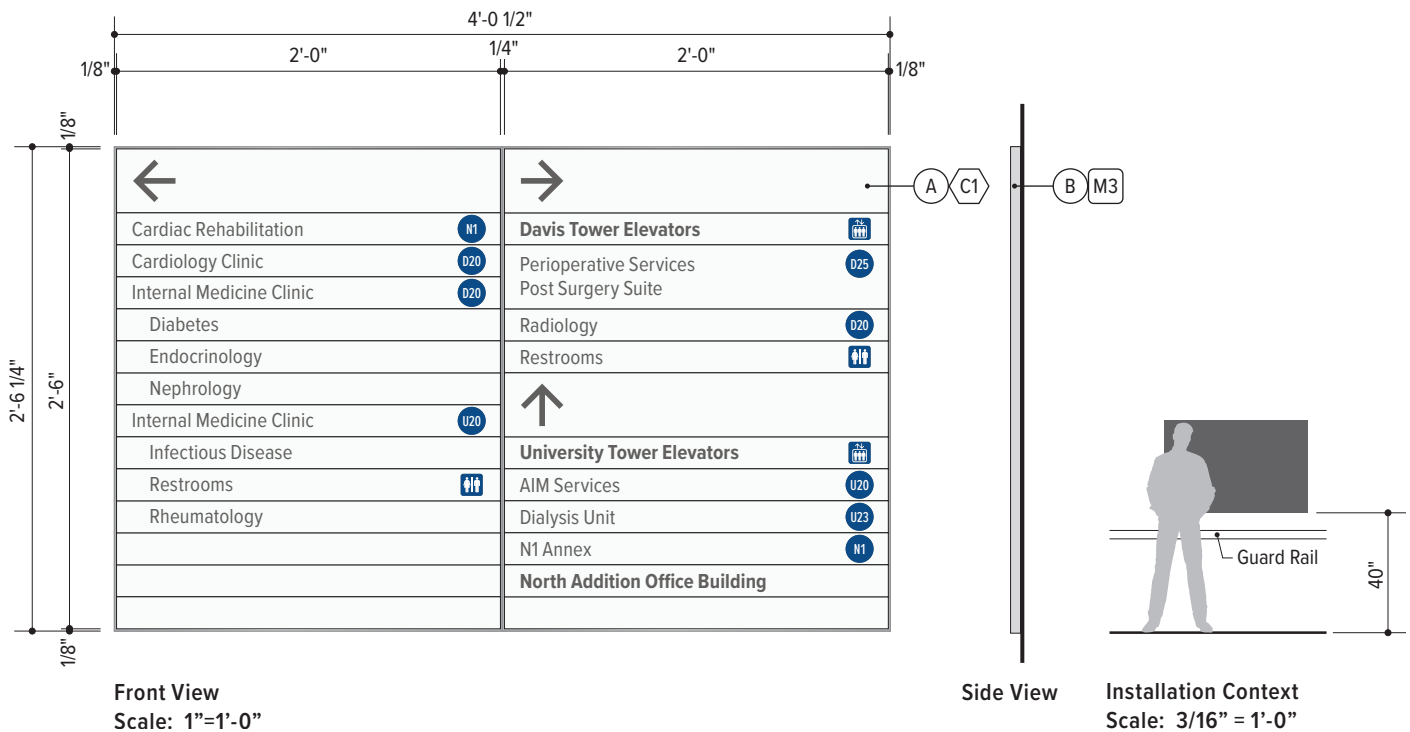

Interior Wayfinding


DIR-S

Public Corridor Directional Strips

Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.


C1 White Wonder C4 UC Davis Blue D0 Printed White D3 PMS Cool Gray 10C D4 UC Davis Blue

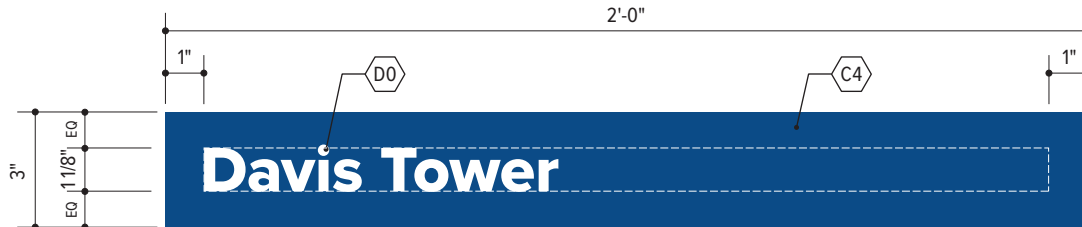

DIR-S.1 Tower Header



DIR-S.2 Directional Strip

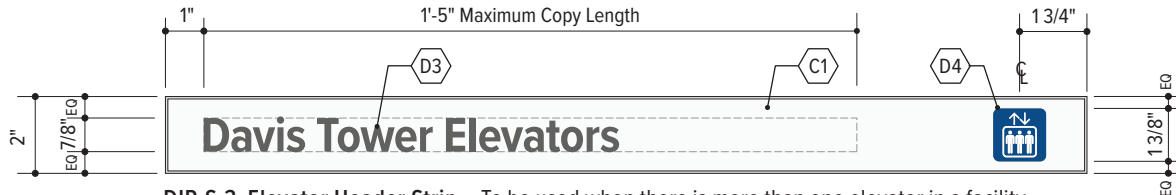


DIR-S.3 Elevator Header Strip - To be used when there is more than one elevator in a facility



DIR-S.4 Standard Strip (Department, Emergency or Amenity)
Maximum Characters Allowed: Approximately 35

Symbol to correspond with Universal Wayfinding Symbol

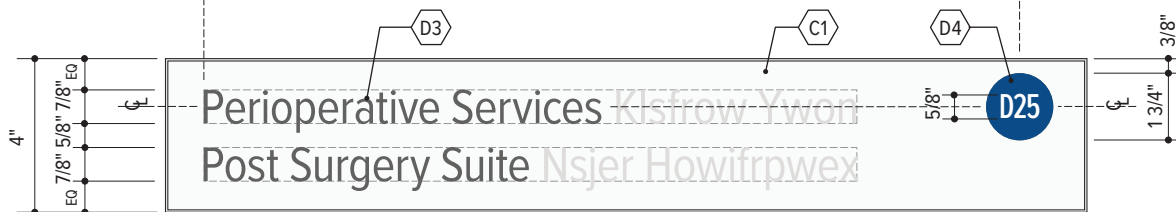

DIR-S.5 Department Strip - Double Height
Maximum Characters Allowed: Approximately 70



DIR-S.6 Sub Department Strip
Maximum Characters Allowed: Approximately 33

Scale: 1:5

Interior Wayfinding

DIR.20

Directional, Small

Usage

This sign type helps visitors and staff navigate to a destination within the building and or department.

- Only use this sign type and size when conditions do not allow for use of DIR.21.

Placement

- Sign is to be placed in hallways, facing on-coming pedestrian traffic at decision points along the path of travel.

Components

- (A) Panel: 1/8" thick non-glare acrylic
 - Finish: subsurface painted
 - Edges: to remain clear, no paint
- (B) Graphics: Subsurface UV cured digital print
 - Typeface: Proxima Nova Regular


Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.


- (C1) White Wonder
- (D3) PMS Cool Gray 10C
- (D4) UC Davis Blue

Installation

- See Appendix A, Drawing FD.10 for approved standard fabrication and installation detail.

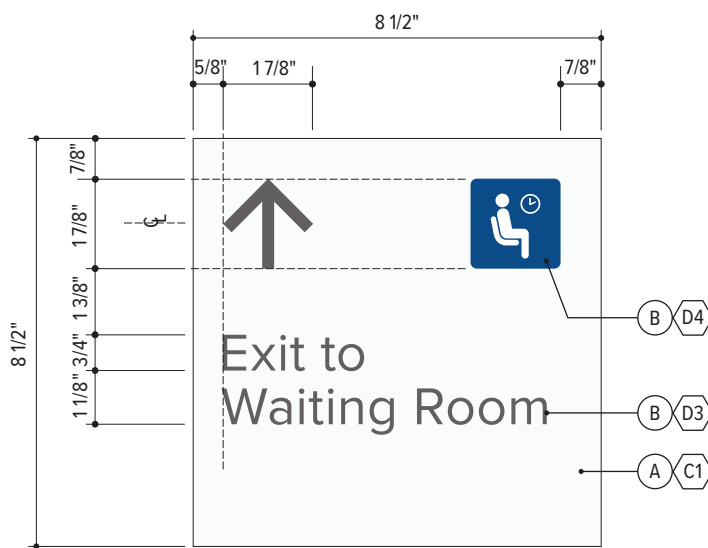

Scale: 3"=1'-0"



Side View



Installation Context
Scale: 3/16" = 1'-0"

Interior Wayfinding

DIR.21

Directional, Medium

Usage

This sign type helps visitors and staff navigate to a destination within the building and or department.

- Preferred sign type and size for directional.

Placement

- Sign is to be placed in hallways, facing on-coming pedestrian traffic at decision points along the path of travel.

Components

- (A) Panel: 1/8" thick non-glare acrylic
 - Finish: subsurface painted
 - Edges: to remain clear, no paint
- (B) Graphics: Subsurface UV cured digital print
 - Typeface: Proxima Nova Regular


Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.

- (C1) White Wonder
- (D3) PMS Cool Gray 10C
- (D4) UC Davis Blue
- (D8) Hospital Blue


Installation

- See Appendix A, Drawing FD.10 for approved standard fabrication and installation detail.




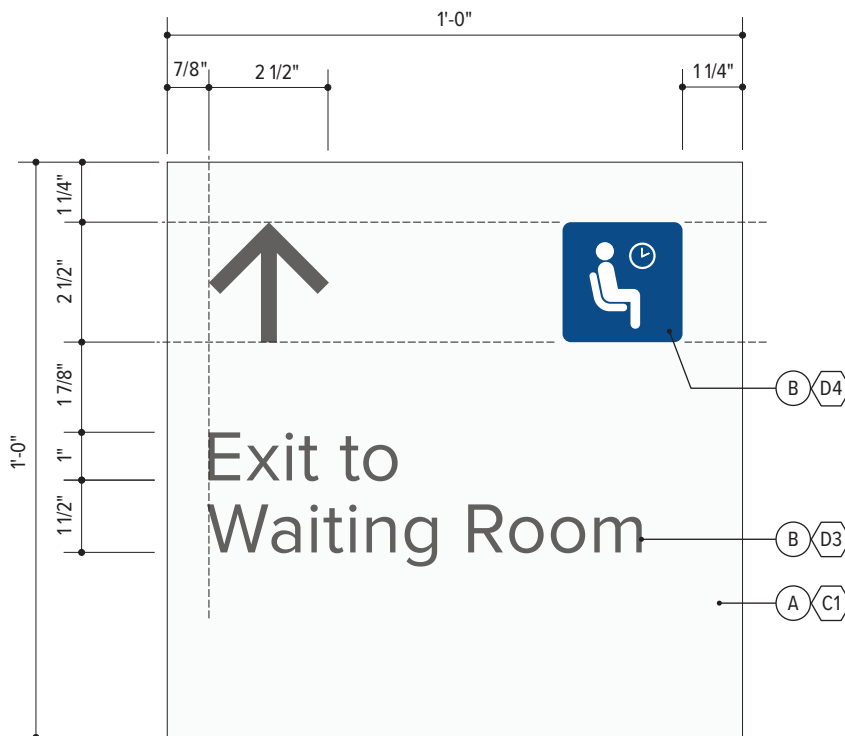


Scale: 3"=1'-0"

Side View

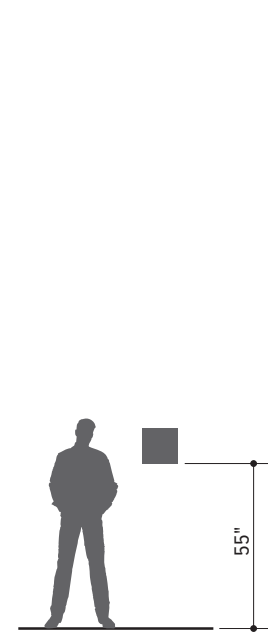

Installation Context
Scale: 3/16" = 1'-0"

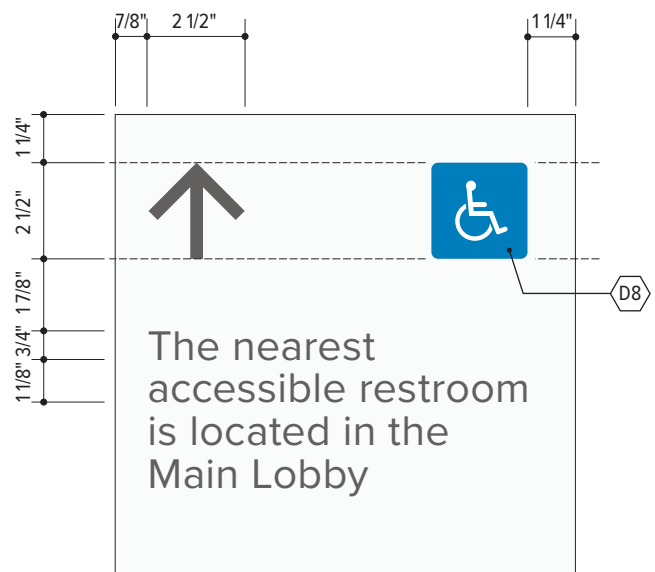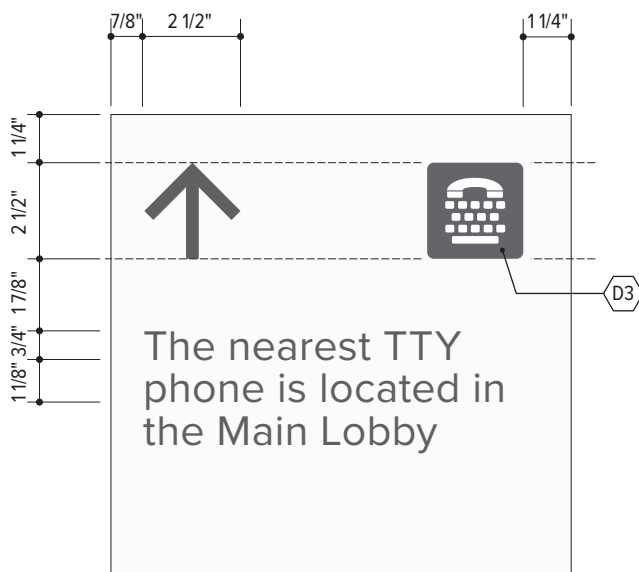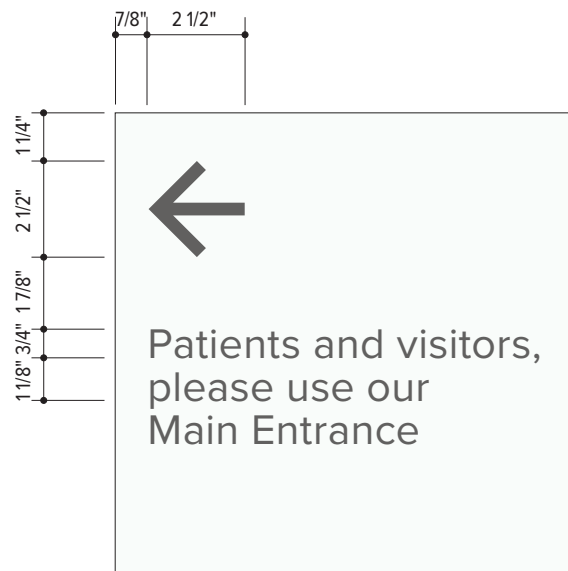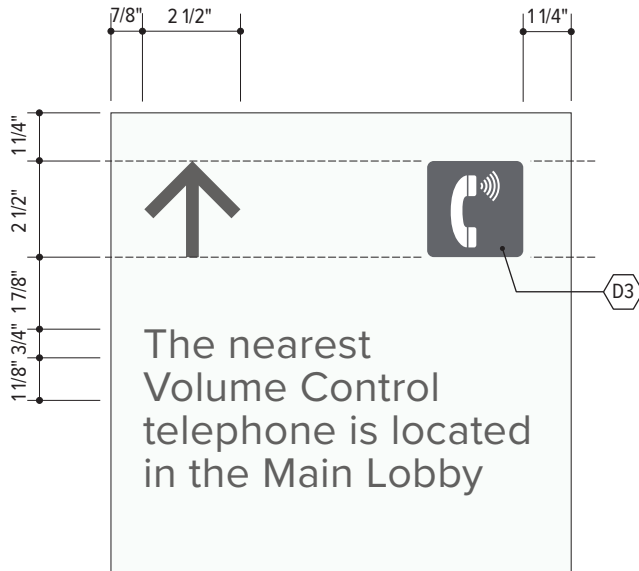

Scale: 1:5

Note: For buildings requiring directional information to accessible restrooms, the consultant shall coordinate with the FP&D Signage Program Representative to determine if an orientation map is needed as a supplement to the directional sign.

Interior Wayfinding

DIR.22

Directional, Large

Usage

This sign type helps visitors and staff navigate to a destination within the building and or department.

- Only use this sign type and size when messaging necessitates.

Placement

- Sign is to be placed in hallways, facing on-coming pedestrian traffic at decision points along the path of travel.

Components

- (A) Panel: 1/8" thick non-glare acrylic
 - Finish: subsurface painted.
 - Edges: to remain clear, no paint.

- (B) Graphics: Subsurface UV cured digital print
 - Typeface: Proxima Nova Regular.


Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.

- (C1) White Wonder
- (D3) PMS Cool Gray 10C
- (D4) UC Davis Blue

Installation

- See Appendix A, Drawing FD.10 for approved standard fabrication and installation detail.

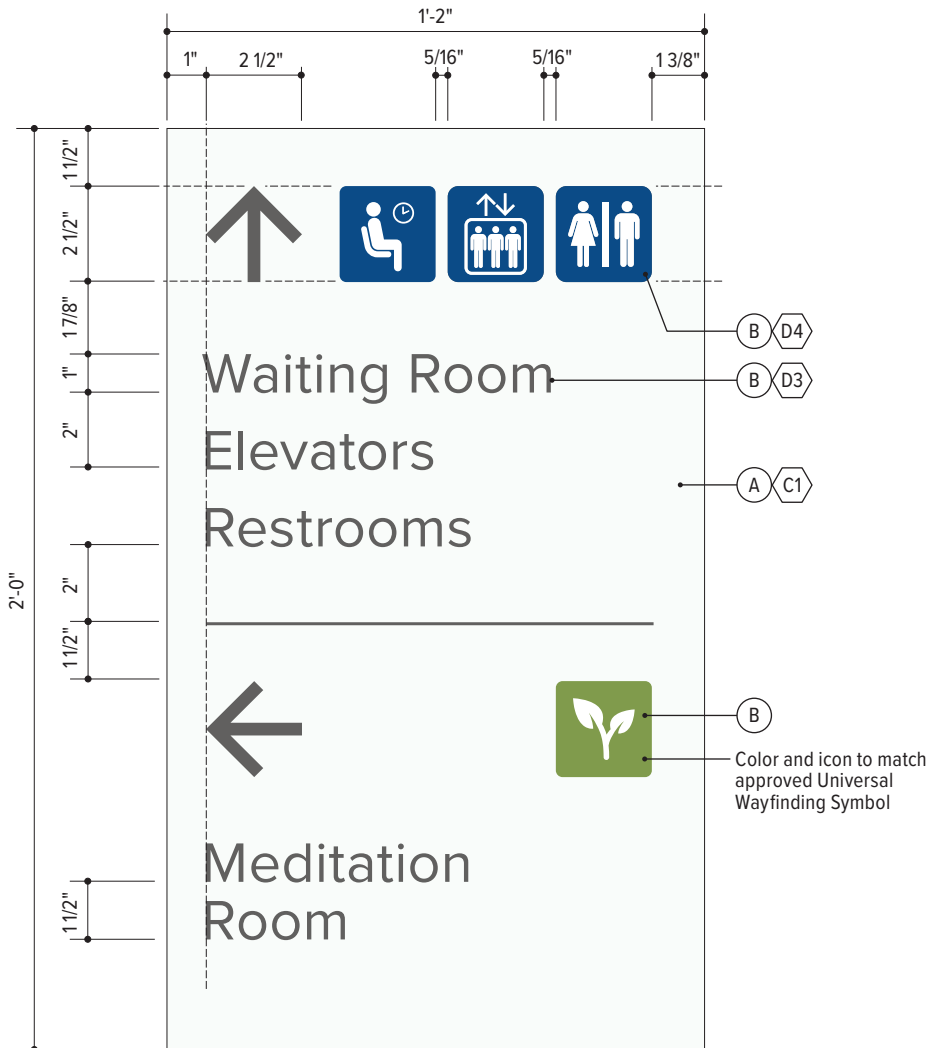

Scale: 1:5

Side View



Installation Context
Scale: 3/16" = 1'-0"

Interior Wayfinding


DIR.30

Overhead Directional, Flag Mounted Layouts



Two Line Layout with Symbol - Side A
 Maximum Characters Allowed:
 Approximately 10 per line

Two Line Layout with Symbol - Side B

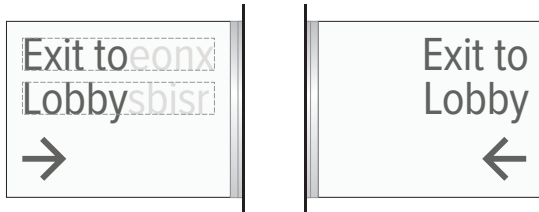


**Two Line Layout
 No Symbol - Side A**

**Two Line Layout
 No Symbol - Side B**




**One Line Layout with
 Symbol - Side A**

**One Line Layout with
 Symbol - Side B**

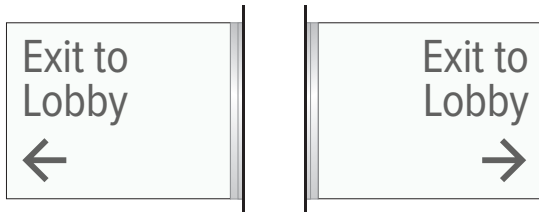

**Two Line Layout
 No Symbol - Side A**

**Two Line Layout
 No Symbol - Side B**

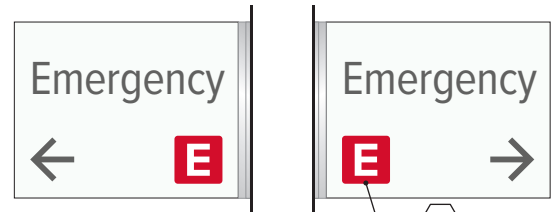

**One Line Layout with
 Symbol - Side A**

**One Line Layout with
 Symbol - Side B**

Interior Wayfinding

DIR.40W

Overhead Directional, Wall Mounted

Usage

This sign type is used in public corridors to help visitors and staff navigate to departments, amenities, and other destinations within the building.

Placement

- Sign is to be placed in hallways, facing on-coming pedestrian traffic at decision points along the path of travel.

Components

- Ⓐ Panel: 1/4" thick acrylic
 - Finish: painted all visible surfaces
 - Graphics: surface UV cured digital print
 - Typeface: Proxima Nova Regular
 - See DIR.40 Face Layouts for additional information

- Ⓑ Accent: architectural aluminum L-channel
 - 1/16" wall thickness, 7/8" high, 3/8" outside
 - Finish: fine satin finish with horizontal grain



Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.

- Ⓒ1 White Wonder
- Ⓓ3 PMS Cool Gray 10C
- Ⓓ6 Emergency Red
- Ⓜ3 Brushed Aluminum

Installation

- See Appendix A, Drawing FD.10 for approved standard fabrication and installation detail.
- **Verification of ceiling and wall conditions, in addition to coordination with the architect on sign placement, is required with nurse call lights, exit signs, other code-related signs, and obstructions.**

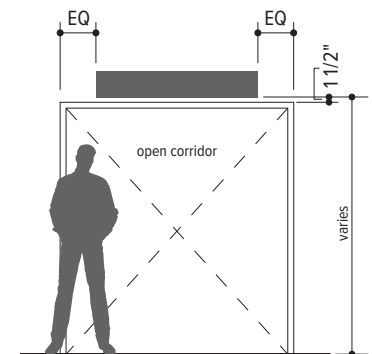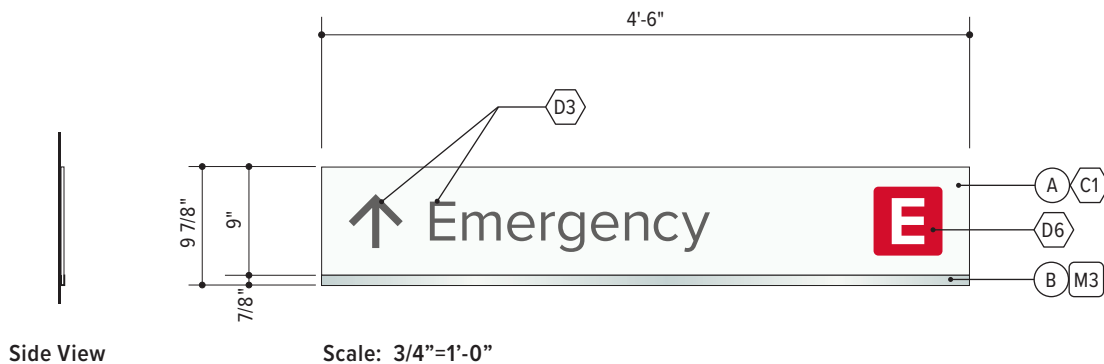

Installation Context
Scale: 3/16" = 1'-0"

Interior Wayfinding

DIR.40C

Overhead Directional, Ceiling Mounted

Usage

This sign type is used in public corridors to help visitors and staff navigate to departments, amenities, and other destinations within the building.

Placement

- Sign is to be placed in hallways, facing on-coming pedestrian traffic at decision points along the path of travel.

Components

- (A) Panel: 1/8" thick opaque white acrylic
 - Finish: painted all visible surfaces
 - Graphics: surface UV cured digital print
 - Typeface: Proxima Nova Regular
 - See DIR.40 Face Layouts for additional information
- (B) Accent: architectural aluminum U-channel
 - 1/16" wall thickness, 7/8" high, 3/8" outside
 - Finish: fine satin finish with horizontal grain

- (C) Johnson Plastics Plus Simply Corridor and Ceiling aluminum bracket #SBCC39SS cut to match the height of sign panel
 - Satin aluminum


Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.

- (C1) White Wonder
- (D3) PMS Cool Gray 10C
- (D6) Emergency Red
- (M3) Brushed Aluminum


Installation

- See Appendix A, Drawing FD.41 for approved standard fabrication and installation detail.
- **Verification of ceiling and wall conditions, in addition to coordination with the architect on sign placement, is required with nurse call lights, exit signs, other code-related signs, and obstructions.**

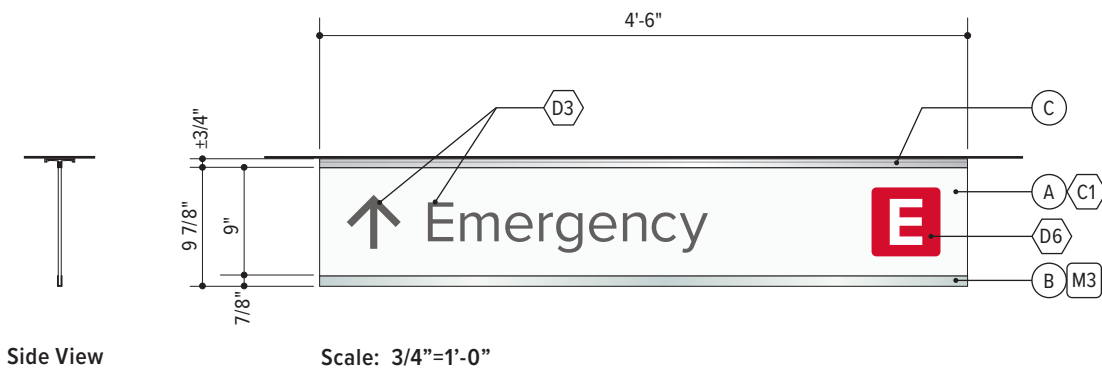

Side View

Scale: 3/4"=1'-0"



Installation Context
Scale: 3/16" = 1'-0"

Interior Wayfinding

DIR.40S

Overhead Directional, Suspended

Usage

This sign type is used in public corridors to help visitors and staff navigate to departments, amenities, and other destinations within the building.

Placement

- Sign is to be placed in hallways, facing on-coming pedestrian traffic at decision points along the path of travel.

Components

- Ⓐ Panel: 1/4" thick opaque white acrylic
 - Finish: painted all visible surfaces
 - Graphics: surface UV cured digital print
 - Typeface: Proxima Nova Regular
 - See DIR.40 Face Layouts for additional information
- Ⓑ Accent: architectural aluminum U-channel
 - 1/16" wall thickness, 7/8" high, 3/8" outside
 - Finish: fine satin finish with horizontal grain

- Ⓒ Rod: aluminum rod with panel gripper and mounting plate
 - Gyford standoff systems part numbers #WL-AUBM, #WL-A64-250 Satin aluminum, vertical grain



Colors & Materials


References as noted below. See Chapter 1: Universal Standards for specifications.

- Ⓒ1 White Wonder
- Ⓒ3 PMS Cool Gray 10C
- Ⓒ4 UC Davis Blue
- Ⓒ6 Emergency Red
- Ⓜ3 Brushed Aluminum

Installation

- See Appendix A, Drawing FD.45 for approved standard fabrication and installation detail.
- **Verification of ceiling and wall conditions, in addition to coordination with the architect on sign placement, is required with nurse call lights, exit signs, other code-related signs, and obstructions.**

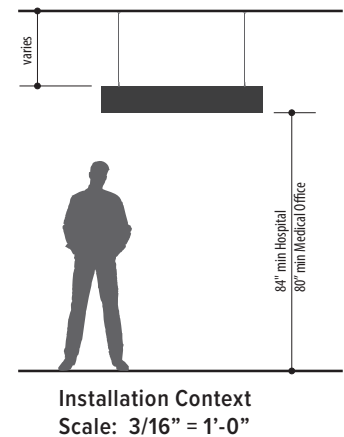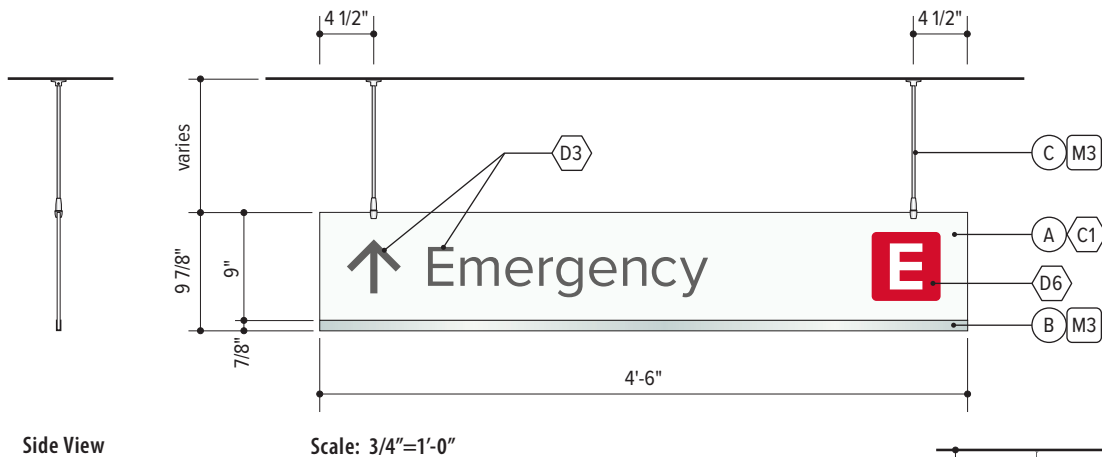

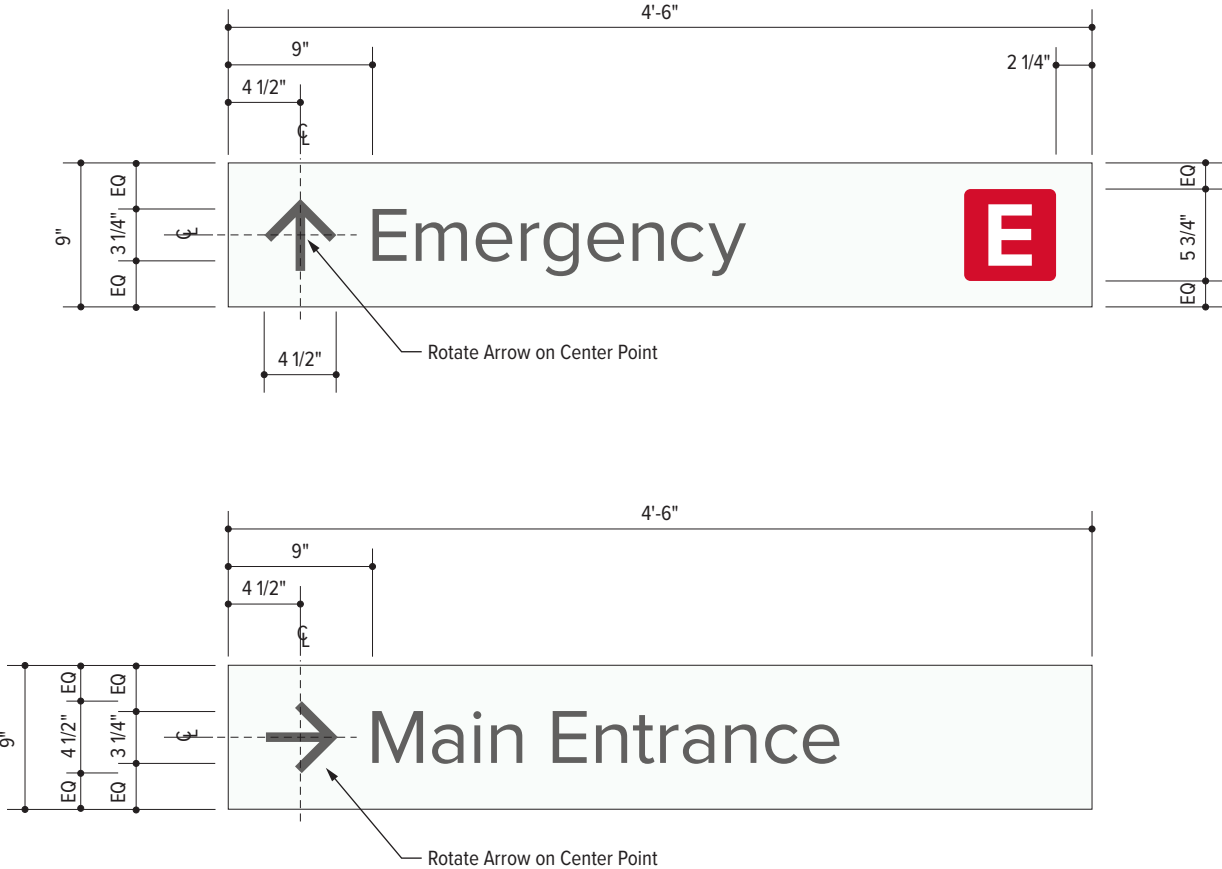

Scale: 1"=1'-0"

Interior Wayfinding

DIR.41W

Overhead Directional, Double Line, Wall Mounted

Usage

This sign type is used in public corridors to help visitors and staff navigate to departments, amenities, and other destinations within the building.

Placement

- Sign is to be placed in hallways, facing on-coming pedestrian traffic at decision points along the path of travel.

Components

- Ⓐ Panel: 1/4" thick acrylic
 - Finish: painted all visible surfaces
 - Graphics: surface UV cured digital print including line between messages
 - Typeface: Proxima Nova Regular
 - See DIR.41 Face Layouts for additional information

- Ⓑ Accent: architectural aluminum L-channel
 - 1/16" wall thickness, 7/8" high, 3/8" outside
 - Finish: fine satin finish with horizontal grain


Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.

- Ⓒ1 White Wonder
- Ⓓ3 PMS Cool Gray 10C
- Ⓓ6 Emergency Red
- Ⓜ3 Brushed Aluminum


Installation

- See Appendix A, Drawing FD.10 for approved standard fabrication and installation detail.
- **Verification of ceiling and wall conditions, in addition to coordination with the architect on sign placement, is required with nurse call lights, exit signs, other code-related signs, and obstructions.**

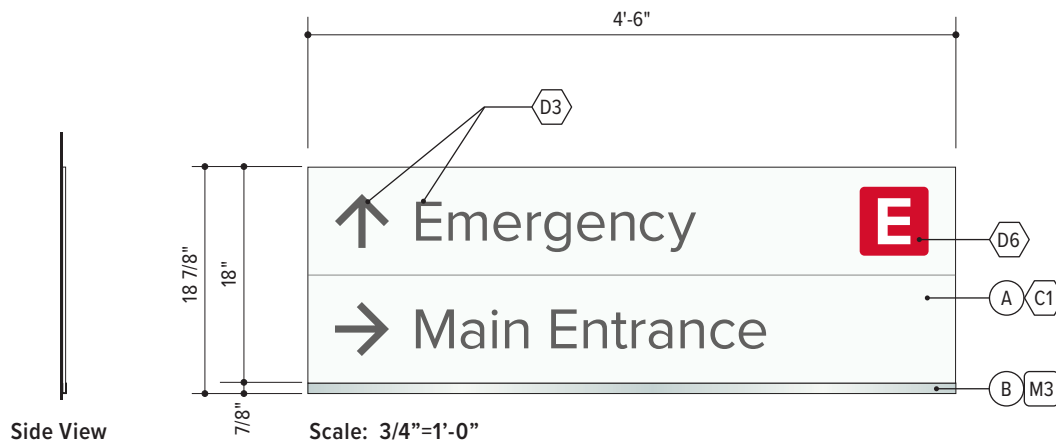

Side View

Scale: 3/4" = 1'-0"

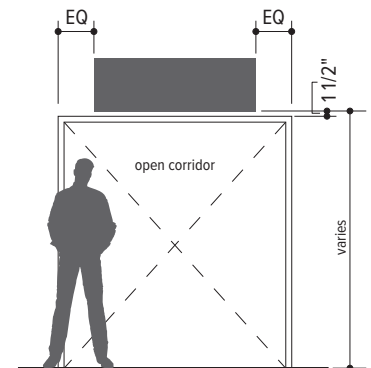

Installation Context
Scale: 3/16" = 1'-0"

Interior Wayfinding

DIR.41C

Overhead Directional, Double Line, Ceiling Mounted

Usage

This sign type is used in public corridors to help visitors and staff navigate to departments, amenities, and other destinations within the building.

Placement

- Sign is to be placed in hallways, facing on-coming pedestrian traffic at decision points along the path of travel.

Components

- (A) Panel: 1/8" thick opaque white acrylic
 - Finish: painted all visible surfaces
 - Graphics: surface UV cured digital print including line between messages
 - Typeface: Proxima Nova Regular
 - See DIR.41 Face Layouts for additional information
- (B) Accent: architectural aluminum U-channel
 - 1/16" wall thickness, 7/8" high, 3/8" outside
 - Finish: fine satin finish with horizontal grain

- (C) Johnson Plastics Plus Simply Corridor and Ceiling aluminum bracket #SBCC39SS cut to match the height of sign panel
 - Satin aluminum



Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.

- (C1) White Wonder
- (D3) PMS Cool Gray 10C
- (D6) Emergency Red
- (M3) Brushed Aluminum

Installation

- See Appendix A, Drawing FD.41 for approved standard fabrication and installation detail.
- **Verification of ceiling and wall conditions, in addition to coordination with the architect on sign placement, is required with nurse call lights, exit signs, other code-related signs, and obstructions.**

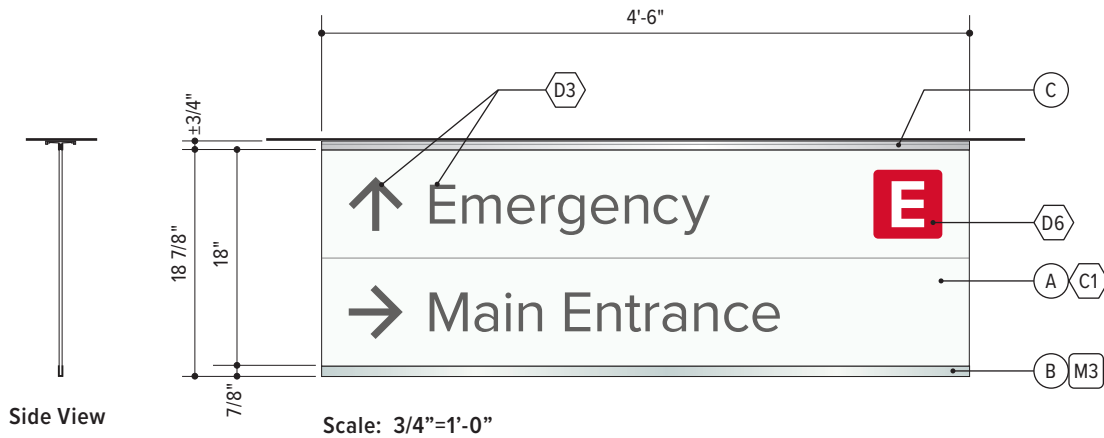

Installation Context
Scale: 3/16" = 1'-0"

Interior Wayfinding

DIR.41S

Usage

This sign type is used in public corridors to help visitors and staff navigate to departments, amenities, and other destinations within the building.

Placement

- Sign is to be placed in hallways, facing on-coming Sign is to be placed in hallways, facing on-coming pedestrian traffic at decision points along the path of travel.

Components

- (A) Panel: 1/4" thick opaque white acrylic
 - Finish: painted all visible surfaces
 - Graphics: surface UV cured digital print
 - Typeface: Proxima Nova Regular
 - See DIR.41 Face Layouts for additional information
- (B) Accent: architectural aluminum U-channel
 - 1/16" wall thickness, 7/8" high, 3/8" outside
 - Finish: fine satin finish with horizontal grain

Overhead Directional, Double Line, Suspended

- (C) Rod: aluminum rod with panel gripper and mounting plate
 - Gyford standoff systems part numbers #WL-AUBM, #WL-A64-250 Satin aluminum, vertical grain


Colors & Materials

References as noted below. See Chapter 1: Universal Standards for specifications.

- (C1) White Wonder
- (D3) PMS Cool Gray 10C
- (D4) UC Davis Blue
- (D6) Emergency Red
- (M3) Brushed Aluminum


Installation

- See Appendix A, Drawing FD.45 for approved standard fabrication and installation detail.
- **Verification of ceiling and wall conditions, in addition to coordination with the architect on sign placement, is required with nurse call lights, exit signs, other code-related signs, and obstructions.**

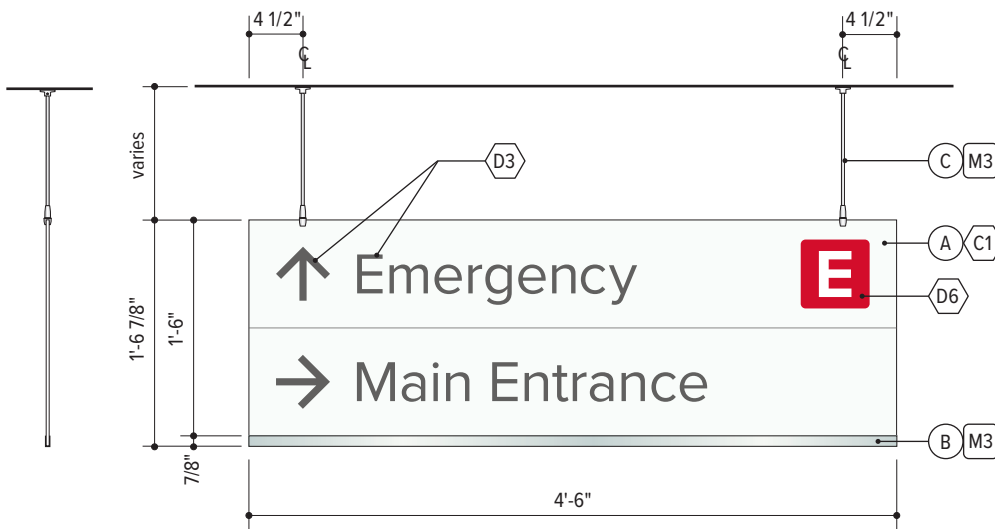

Side View

Front View
Scale: 3/4"=1'-0"

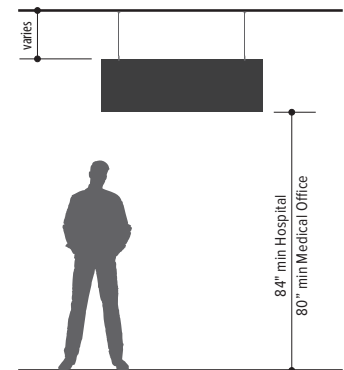

Installation Context
Scale: 3/16" = 1'-0"

Interior Wayfinding

DIR.41

Sign Face Layouts

